



Memorando DTI nº 254/2016

Diamantina, 01 de novembro de 2016

A Sua Senhoria, A Senhora
Lilian M. Fernandes
Diretora Logística/UFVJM

Assunto: Justificativa de itens de licitação de suprimentos de T.I

Prezada,

Em atendimento à sua solicitação:

“Ao elaborar o edital para aquisição de suprimentos de T.I., foram detectadas marcas em alguns dos itens constante da relação de materiais a serem licitados. Conforme já informado, anteriormente, é necessária a apresentação de justificativa técnica para que o item seja licitado através da marca:” .

Justifico que os itens solicitados:


- Processador Intel Xeon 4C E5606 80W 2.13GHz/1066MHz/8MB W/Fan P/N 81Y6549 para Servidores IBM X3550 M3
- Processador Intel Xeon 6 Core X5650 95W 2.66GHZ 12MB L3 Cache 6.4GT/S para Servidor Dell PowerEdge R610
- Processador Intel Xeon 4 Core E5606 80W 2.13GHz 8MB L3 Cache para Servidor HP Proliant DL160 G6
- Processador Intel Xeon 4 Core X3440 95W 2.53 GHz 8M L3 Cache para Servidores HP Proliant DL120 G6.

Faz-se necessário exigir o marca e modelo devido fato de serem os únicos aceitos pelo fabricante variando apenas frequencia e clock e não há no mercado produtos similares e de outras marcas que funcionem com os servidores hospedeiros dos produtos a serem licitados. Tais informações podem ser comprovadas através do Datasheet (ficha de dados) de cada equipamento a seguir.



HP ProLiant DL120 G6 Server

Data sheet



The HP ProLiant DL120 G6 Server is a right-sized, right-priced solution configured to meet the varying application demands of your data center.

The HP ProLiant DL120 G6 Server is an enterprise-class entry rack server ideal for dedicated Web and Edge applications. Built using the latest industry-standard technologies, it delivers affordable performance for scale-out applications and provides essential features for varied computing needs.

The DL120 G6 server supports Intel Xeon processors, in addition to all the performance advantages of a quad-core architecture. An array of Intel Xeon quad-core processors gives you the option to choose the appropriate processor based on application demands and costs.

As a single processor 1U server, the DL120 G6 server provides two PCI Express slots with an optional third x4 PCI slot. Additional upgrades, including

HP SAS HBAs and Smart Array Controllers, provide support for SAS hard disk drives. In addition, the HP LO100i is a remote management feature that helps you manage your servers remotely.

An ideal solution for growing businesses, the DL120 G6 server delivers expandability through a mix of PCI and PCI-Express slots, DIMM slots, drive bays, and server options. The Integrated LO100i remote management reduces physical visits to servers, thus cutting down operational costs. An updated version of the HP Easy Set Up CD eases the installation process. Optional Trusted Platform Module (TPM) provides an additional level of security. And the standard power supply is now more efficient, enabling you to reduce power consumption.

Key features and benefits

Right-sized, right-priced solution

- Variable cost Intel Xeon Quad-Core processors enable you to pick the right processor based on workload requirements
- Server supports large form factor SATA and SAS hard disk drives that combine low-cost benefits, high capacity, high performance, and high reliability, all at the same time
- HP Embedded 6 Port SATA Controller and an array of SAS HBAs and Smart Array Controllers
- Scalable performance with six DIMM sockets with support for buffered and registered ECC memory

Ease of management

- Provides an easily accessible, rack-optimized 1U chassis for fast deployment and efficient maintenance
- Responds quickly to server issues with essential entry-level remote management, which is offered at an affordable price
- Offers browser and command line interface access

Proven HP dependability and support

- Thorough testing processes make your HP ProLiant server dependable
- Full range of service and support for every budget, including startup, installation, extended warranty, network planning, and software updates
- Access to HP helpdesks and service professionals for round-the-clock support

Ideal environments

- Environments running a technology infrastructure or Edge applications such as file/print, Web and messaging, smaller vertical applications, or dedicated application server.
- Small and medium entry-level, budget-conscious businesses that need a single processor server solution with cost-effective SATA hard drives.
- Growing companies with remote locations or collocated servers. The 1U chassis increases density while keeping power consumption to within pre-determined limits—a concern for upcoming data centers.

What's new?

- Latest quad-core Intel Xeon 3400 series processors provide better and faster system performance
- Support for DDR3 1066/1333MHz unbuffered ECC memory offers approximately 10% performance gain over DDR2 and support for DDR3 800/1066/1333 registered memory
- Support for PCI-e Gen2 x16 link provides better flexibility to deploy the PCIe option
- Standard power supply with 80% efficiency helps reduce overall operational costs
- Optional TPM 1.2 support offers better data security with hardware-based encryption and authentication
- Integrated remote management with LO100i provides standard remote management capability with optional advanced features

Why HP?

Leadership

HP has one of the world's largest and most specialized forces of consultants combined with a broad choice of technology platforms in the industry.

Industry expertise

The HP solution is based on cost-effective industry standard technology that can be easily integrated and can scale-up with the potential to support millions of users. HP provides comprehensive, end-to-end solutions, including hardware, software, and services.

Open standards

The HP solution is modular and built on open standards. This encourages a high degree of customization to fit your specific needs and requirements.

Management

HP offers unique products and solutions, proven methodology, and full lifecycle service capabilities to manage your project—from business requirements to implementation.

HP ProLiant DL120 G6



Processor Type	Intel® Xeon® processor X3400 series Intel® 3420 Chipset
Available Processors	Intel® Xeon® processor HP X3430 (2.40GHz, 95W, 8MB, 1333, Turbo) Intel® Xeon® processor HP X3440 (2.53GHz, 95W, 8MB, 1333, HT, Turbo) Intel® Xeon® processor HP X3450 (2.67GHz, 95W, 8MB, 1333, HT, Turbo) Intel® Xeon® processor HP X3460 (2.80GHz, 95W, 8MB, 1333, HT, Turbo) Intel® Xeon® processor HP X3470 (2.93GHz, 95W, 8MB, 1333, HT, Turbo)
Processor Core	Quad core
Processor Cache	Integrated 1x8MB Level3 Intel® Smart Cache
Max Processor Speed	2.93GHz
Management	LO100i; System setup and update, health agents, SIM support
Multi-processor	1
Max Front Side Bus Speed	1333 MHz
Memory Type	32GB PC3-10600 (DDR3-1333MHz)
Standard Memory	
Max Memory	Support up to 16GB DDR3 1066/1333 unbuffered ECC DIMM or 32GB DDR3 800/1066/1333 Registered DIMM
Advanced Memory Protection	ECC
Storage	
Storage Type	3.5" Hot Plug SAS 3.5" Non-Hot Plug SATA
Hard Drives Supported	Up to 4 non-hot plug SATA/SAS 3.5" drives supported
Max Internal Storage	3.0TB
Max Internal Devices	2
Removable Media Bays	1
Expansion Slot	3 total (1) Full length PCI Express Gen 2 x16 slot (x16 connector) (1) Half-length, low-profile PCI Express x4 slot (x8 connector) (1) PCI-Express Gen 1 x1 (x4 connector)
Storage Controller	Integrated 6 Port SATA (4 ports available for hard disks)
Deployment	
Form Factor	Rack
Rack Height	1U
Networking	Embedded HP NC107i PCI Express Gigabit Server Adapter
Remote Management	Lights-Out 100i
Warranty	3-year, next day parts replacement

Smartest way to invest in technology

HP Financial Services provide innovative financing and financial asset management programs to help you cost effectively acquire, manage, and ultimately retire your HP solutions. For more information on these services, please contact your local HP representative or visit: www.hp.com/go/hpfinancialservices

For more information

For more information about the HP ProLiant DL120 G6 Server, contact your local HP representative, or visit: www.hp.com/servers/dl120-g6

HP Services

When Technology Works. Business Works.

The challenge of virtually every technology organization is similar: To develop and maintain an agile, efficient server infrastructure that delivers the service levels your business needs. HP Technology Services offer a comprehensive portfolio of HP Care Pack Services to help design, deploy, manage, and support your technology environment, enabling cost-effective upgrades to standard warranty with easy-to-buy, easy-to-use support packages.

Minimum Recommended HP Care Pack offerings

- Three-year, next business day response onsite 9-hour x 5-day coverage, hardware support
- Hardware Installation only

Enhanced service level Care Pack offerings

- Three-year same business day 4-hour response onsite 13-hour x 5-day coverage, hardware support
- Hardware Installation plus operating system installation and startup

Benefit from HP Care Pack Services helping you:

- Reduce deployment time and manage ProLiant server solutions smoothly and efficiently.
- Increase uptime and performance of servers availability to your business.
- Detect, diagnose, and repair problems to quickly save time, money, and resources.

For more information, visit

www.hp.com/services/proliantservices or
www.hp.com/go/proliant/carepack

Technology for better business outcomes

To learn more, visit www.hp.com/servers/dl120-g6

© Copyright 2009 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

4AA2-9641ENW, October 2009



Get connected

www.hp.com/go/getconnected

Current HP drivers, support & security alerts
delivered directly to your desktop





HP ProLiant DL160 G6 Server

Data sheet



Simple, flexible, manageable: Ideal for memory intensive, Web 2.0 and high performance computing environments

Today, the demands of high-performance computing (HPC) call for a server infrastructure with larger memory and enhanced processing power without compromising on reliability. In addition, it must be ready to tackle the increasing load of Web 2.0 applications like cloud hosting. To run at optimum efficiency within a tight budget—now that is a tall order.

The HP ProLiant DL160 G6 fits the bill. It is a high performance, economical, ultra-dense rack server node for memory intensive HPC environments. Designed for quality, performance, and flexible deployments to meet the needs of the HPC, small and medium business, and corporate scale-out deployments; the DL160 G6 is your answer to achieve high efficiency, high density, high compute at an affordable price.

Now, benefit from up to 192 GB of memory with 16 GB DIMMs designed to hit the largest memory footprints or use decreased cost, lower density memory to achieve larger memory footprints than before. Achieve large, inexpensive memory configurations with 18 DIMM slots available. The DL160 G6 has the flexibility and scalability appropriate to meet the needs of a variety of computing tasks. Moreover, the 1U form factor allows better utilization of server rack and data center space, making it suitable for SMBs, growing businesses, Web 2.0 customers, and large data centers.

Key features and benefits

Improved performance

The DL160 G6 is an economical 2P server that cuts out unnecessary options—optimized for budget constrained and scale-out environments—enabling cost enhanced memory solutions.

- **Increased memory:** If you run a memory intensive business, enhanced memory is your foremost requirement. With the DL160 G6 you get up to 192 GB DDR3 system max memory footprint.

Say good bye to power wastage and reclaim lost data center power. The HP ProLiant series meets energy saving yardsticks as defined by Climate Savers Computing Gold, 80PLUS Gold.

- **SAS/SATA technology:** Capitalize on the SAS/SATA technology that comes with the HP Smart Array Controllers. They use 6-gigabit per second (Gb/s) SAS technology. With SAS technology, smart array controllers provide higher throughput, increased performance, and enhanced reliability.
- **QuickPath Interconnect (QPI) architecture:** Intel® QPI architecture integrates a memory controller into each microprocessor and connects processors and other components with a new high-speed interconnect. This provides high-speed connections between microprocessors and external memory, and between microprocessors and the I/O hub. In cases where a processor needs to access the dedicated memory of another processor, it can do so through a high-speed Intel QuickPath Interconnect that links all the processors.
- **Hyper threading technology:** This enhances performance, improves business productivity, and provides faster response times. With the CPU made to act like multiple CPUs, number of transactions can be processed simultaneously, which means faster response times, hence better customer experience.

High degree of reliability

Intense competition and the ever-changing business landscape mean that you need a data center that you can rely on. Drawing strength from latest industry standard technologies, the DL160 G6 offers enhanced throughput and dependability at a low cost. It also offers:

- **Latest six-core Intel Xeon processors:** The new embedded six-core Intel Xeon® Processors help you address growing computing and data needs of many business-critical applications, while enabling virtualization.
- **Increased bandwidth:** Standard industry leading PC3-10600 DDR3 registered and unregistered DIMMs with up to 192 GB memory to provide increased bandwidth for high uptime and memory intensive performance.
- **Miscellaneous features:** Embedded HP NC362i dual-port 1Gb NIC features load-balancing, jumbo frame, failover, and sideband support.
- **Increased storage:** Scalable internal bays to meet your storage needs with up to four Large Form Factor 3.5" non-hot plug SATA or hot plug SATA/SAS or eight 2.5" Small Form Factor hot plug SATA/SAS hard drive bays.
- **Customized platform:** Build to order your platform with options based on your unique performance needs, including processors, memory, hard drives, and HP Care Pack services.

Energy efficiency leadership

Striking a balance between enhanced productivity and rising energy can be challenging. It may seem like it is a choice between paying soaring power bills, increasing profits, or rising prices. A better option is to choose energy efficient products. The HP ProLiant series reduces power consumption without compromising the performance. They satisfy the energy saving criteria defined by Climate Savers Computing Gold, 80PLUS Gold. Further, they can:

- **Reclaim lost data center power:** Use the HP Power Advisor and select the right-size power supply. This helps IT administrators reclaim lost data center power. Less oversubscription means more capacity opportunity.
- **Prevent power wastage:** G6 ProLiant systems can tell when power is being wasted and compensate for it. Smart Sensors throughout the server allow intelligent actions to preserve, protect, and enhance performance and power savings.
- **Support registered and unregistered memory:** Systems are no longer burdened with the extra wattage consumed by fully buffered memory.

Data security

Customer and business information stored on corporate databases is a critical business asset, vulnerable to hackers and other similarly catastrophic mishaps. So, the DL160 G6 offers an optional feature called Trusted Platform Module (TPM) that encrypts the hard drive and prevents unauthorized access from another operating system (OS). It also prevents offline viewing of the files that make up the OS itself.

Akin to the Smartcard, it:

- Protects secrets (data)
- Performs cryptographic functions
 - RSA, SHA-1, RNG
- Can create, store, and manage keys
 - Provides a unique Endorsement Key (EK)
 - Provides a unique Storage Root Key (SRK)
- Performs digital signature operations
- Holds platform measurements (hashes)

Ease of use/simple deployment

The DL160 G6's easy-access chassis and internal component labels facilitates fast and simple maintenance, in-rack serviceability, and expansion.

- **Simple:** The DL160 G6 comes with an easy set-up CD that enables quick installation/deployment.

- **Manageable:** Its rack-optimized 1U form factor facilitates fast deployment and efficient management of large-scale cluster and grid solutions. Inclusion of SNMP agents further aids comprehensive management.
- **Flexible:** Its easy-access chassis and internal component labels give you the flexibility to expand your data center as and when the need arises.

Support

Enjoy dependable support from HP when you purchase the DL160 G6.

- **After sales support:** Global server support network to assist you with setup, installation, and provides reliable after sales support when you need it from a single point of contact.
- **Mid-range technical computing:** A broad choice of pre-configured, factory-integrated, and tested cluster packages ideal for mid-range technical computing

Ideal environment

If your business operation centers on memory intensive applications—like file and print, networking HPC, and Web 2.0 applications, the HP DL160 G6 provides support for all of these.

High performance computing

- Maximum server performance with Intel's latest six-core technology and 12 MB Level 3 cache per processor, embedded HP NC362i dual-port 1Gb NIC with sideband support for management needs
- Up to 192 GB DDR3 system max memory footprint for memory intense applications and 3D models

SMB and midmarket

- Better server performance at prices that meet small and medium business' budget needs
- Ideal for infrastructure, file/print, and Web serving—in a high density package
- Now supporting Next Generation Smart Array Controllers for your entire RAID and caching read/write needs

Web 2.0 Customers

- Now with four 3.5-inch HDD for up to 8 TB of storage in 1U or 8 2.5-inch HDDs for super fast SAS and RAID local storage sets
- Two PCI-Express 2.0 slots for maximum I/O performance
- Low power processors and high efficiency power supplies to help maximize performance in a watt sensitive scale-out environment
- 18 DDR3 DIMM slots allowing economical, robust memory footprints

HP Financial Services

HP Financial Services provides innovative financing and financial asset management programs to help you cost-effectively acquire, manage, and ultimately retire your HP solutions. For more information, contact your local HP sales representative, or visit:

www.hp.com/go/hpfinancialservices

For more information

For more information about the HP ProLiant DL160 G6 Server contact your local HP representative, or visit:

www.hp.com/servers/dl160-g6

HP Services

When technology works, business works

The challenge of virtually every IT organization is similar: To develop and maintain an agile, efficient server infrastructure that delivers the service levels your business needs.

HP Technology Services offer a comprehensive portfolio of HP Care Pack Services to help design, deploy, manage, and support your IT environment, enabling cost-effective upgrades to standard warranty with easy-to-buy, easy-to-use support packages.

Minimum recommended HP Care Pack offerings

- Three-year, next business day response, onsite 9-hour x 5-day coverage, hardware support
- Hardware installation only

Enhanced service level Care Pack offerings

- Three-year, same business day 4-hour response, onsite 13-hour x 5-day coverage, hardware support
- Hardware Installation plus operating system installation and startup

Benefit from HP Care Pack Services helping you:

- Reduce deployment time and manage ProLiant server solutions smoothly and efficiently
- Increase uptime and performance of servers availability to your business
- Detect, diagnose, and repair problems to quickly save time, money, and resources

For more information, visit

www.hp.com/services/proliantservices or
www.hp.com/go/proliant/carepack

Technical specifications

Processor Type	Intel® Xeon® 5500 and 5600 series
Available Processors	Six-Core Intel Xeon Processor X5680(3.33Ghz, 130W) Six-Core Intel Xeon Processor X5670(2.93Ghz, 95W) Six-Core Intel Xeon Processor X5660(2.80Ghz, 95W) Six-Core Intel Xeon Processor X5650(2.66Ghz, 95W) Six-Core Intel Xeon Processor L5640(2.26Ghz, 60W) Quad-Core Intel Xeon Processor E5640(2.66Ghz, 80W) Quad-Core Intel Xeon Processor E5630(2.53Ghz, 80W) Quad-Core Intel Xeon Processor E5620(2.40Ghz, 80W) Quad-Core Intel Xeon Processor L5630(2.13Ghz, 40W) Intel Xeon Processor E5506(2.13Ghz, 80W) Intel Xeon Processor E5503(2.0Ghz,DC)
Processor Core	6, 4, or 2
Processor Cache	4 MB, 8 MB or 12 MB Level 3 Cache
Max Processor Speed	3.33 GHz
Multi-processor	2
Max Front Side Bus Speed	NA
Memory Type	PC3-10600R (DDR3-1067) Registered Memory PC3-10600E (DDR3-1067) Unbuffered Memory
Standard Memory	4 GB (1x4 GB), 8 GB (2x4 GB), or 12 GB (3x4 GB) depending on model
Max Memory	192 GB
Memory Slots	18
Advanced Memory Protection	Advanced ECC
Storage Type	Hot plug 2.5-inch SAS Hot plug 2.5-inch SATA Hot plug Midline Solid State Drives Hot plug 3.5-inch SAS Hot plug 3.5-inch SATA Non-hot plug 3.5-inch SATA
Max Number of Hard Drive	8
Max Number of Hard Drive Note	Support for up to 8 Small Form Factor Hard Drives
Removable Media Bays	1
Expansion Slot	2
Storage Controller	HP Smart Array B110i SATA RAID Controller (standard) and Smart Array Controller (optional)
Form Factor	Rack
Rack Height	1U
Networking	Embedded HP NC362i Integrated Dual Port Gigabit Server Adapter
Remote Management	Lights-Out 100i
Redundant Power Supply	1 built-in power supply with N+1 Fans
Warranty	3 year parts



Get connected

www.hp.com/go/getconnected

Current HP drivers, support & security alerts
delivered directly to your desktop

Technology for better business outcomes

To learn more, visit www.hp.com/servers/dl160-g6

© Copyright 2009–2010 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel and Xeon are trademarks of Intel Corporation in the U.S. and other countries.

4AA2-4862ENW Rev. 1, February 2010



Leadership enterprise server with significantly lower cost of ownership in a highly available and expandable, rack-dense, 1U dual-socket server



Product Guide

February 2011



IBM System x3550 M3

Product Overview

Outstanding innovation in only 1U

Suggested Uses: All sectors requiring highly available, energy-efficient, rack-optimized solution for physical and virtual intensive commercial environments like eBusiness/eCommerce, collaboration, virtualization, database, and enterprise resource planning applications.

Your challenge is to do more with less—serve more Web pages, handle more secure connections, support more e-mail users. You need to reduce the costs of doing business and improve the service you deliver to your customers while lowering your overall risk. The **dual-socket IBM® System x3550 M3** can reduce your costs with its new energy smart design. It can improve service with reduced operational complexity and increased management functionality. It will lower your IT risk with the resiliency that comes from no single point of failure. And like all IBM servers, the x3550 M3 offers you the trust that comes from the IBM global reach, service and support.

The x3550 M3 is a game-changing rack server that uses significantly less power than previous generations, with unified systems management tools, leadership reliability, availability, and serviceability features and broad systems flexibility, housed in a compact 1U mechanical package.

The x3550 M3 features **Intel® Xeon® 5600 series 6-core and 4-core** processors, with up to **12MB** of shared **L3 cache**, to provide you with the computing power you need to match your business needs and growth. The new line of Intel processors delivers unprecedented intelligent performance with features like adaptive performance for applications and environments, Turbo Boost Technology and Hyper-Threading Technology, and integrated power gates and automated power management.

The x3550 M3 supports up to **18 DIMMs / 192GB** of **registered (RDIMM) 1333MHz DDR3** memory (or up to **12 DIMMs / 48GB** of unbuffered UDIMM memory) and provides **Chipkill™ ECC** (Error Checking and Correcting) protection—for high performance and reliability. For even higher levels of availability, the x3550 M3 also offers **memory mirroring**. Up to **4** integrated high-speed **Gigabit Ethernet** ports are available (offering **TOE** (TCP Offload Engine) support on Microsoft® Windows®), as are two high-performance adapter slots (**PCIe x16**). The x3550 M3 offers an optional **embedded hypervisor** to manage your virtual workloads.

The x3550 M3 offers a choice of up to supports up to **8** high-performance hot-swap HDDs with an internal storage capacity of **8TB¹** (**2.5-inch hot-swap Serial-Attached SCSI (SAS)** or **Serial-Attached ATA (SATA)** drives). Alternatively, up to **8 solid-state drives (SSDs)** are also available to keep power low, improve resiliency, and offer up to **400GB** of storage. The server includes a choice of several IBM ServeRAID® storage controllers that provide broad levels of **hardware-based RAID solutions**. The ultradense **1U** form factor allows businesses to increase their computing power and spread their workload without outgrowing their current data center. Up to **42** of these **1U** servers can be installed in a single 42U rack, for a total of up to **84** processors and **504** processor cores, offering tremendous deployment flexibility.

Standard in the x3550 M3 is the Integrated Management Module (IMM) that enables the user to manage and control the server easily—both locally and remotely. In conjunction with the IMM, the x3550 M3 comes with an **altitude sensor (altimeter)** that **governs fan rotation** based on altitude, to help lower your energy consumption. The IMM offers a high level of manageability that is designed to keep costs down and the system up—even when network usage increases. IBM's innovative pop-out/drop-down **light path diagnostics** panel enables quick servicing of the system if a problem develops. These advanced features help maximize network availability by increasing uptime, as do hot **simple-swap solid-state drives; hot-swap/redundant SAS or SATA HDDs**, redundant ultra-efficient **power supplies** and **fan modules; Active Memory™**; integrated **RAID**; **temperature-controlled fans** with **Calibrated Vectors Cooling™**; **IPMI 2.0** support, including **highly secure remote power control** and **Serial over LAN**; as well as **text-console redirect over LAN**.

CONTENTS

Product Overview	1
Selling Features	2
Key Features	4
Key Options	13
x3550 M3 Images	14
x3550 M3 Specifications	15
The Bottom Line	18
Server Comparison	20
For More Information	21
Legal Information	21

¹ 1TB drives available in 2Q/2011.

Another improvement with the new generation of X-Architecture is the replacement of legacy BIOS with a new generation **United Extensible Firmware Interface (UEFI)**. UEFI provides a more intuitive user interface and understandable event logs and better management.

With the inclusion of unique IBM service and support features such as the IMM, light path diagnostics, **IBM Systems Director**, **IBM Systems Director Active Energy Manager™**, **IBM ServerGuide™** and support for the optional Virtual Media Key for remote presence capability, the x3550 M3 is designed for superior uptime.

The x3550 M3 passed the NEBS 1/ETSI equivalent compliance for both AC and DC power supplies and compliance with 80 PLUS® and ENERGY STAR® standards (model dependent), demonstrating exceptional energy efficiency. For more information about IBM's ENERGY STAR compliance, visit http://ibm.com/systems/greendc/green_technology/energy_star/index.html.

If you need highly manageable, dual-socket/multi-core computing power in a rack-dense, energy-efficient package, the x3550 M3 is the ideal system.

Selling Features



Price/Performance

The x3550 M3 offers numerous features to boost performance and reduce costs:

- Up to **two 6-core or 4-core** Xeon 5600 series processors and up to **12MB** of cache per processor, offer superior performance capable of tackling the toughest jobs. Xeon 5600 series processors offer up to **54%** better performance than the previous-generation 5500 series processors (depending on workload).
 - **Low-voltage processors** draw less energy and produce less waste heat than high-voltage processors, thus helping to reduce data center energy costs. Selected **4-core** Xeon 5600 series processors (available via CTO) use only **40W**, and selected **6-core** processors consume only **60W**. This is less than half the wattage consumed by 130W processors.
 - **Eighteen** DIMMs of ultra-fast registered **1333MHz DDR3 ECC** memory with **Chipkill²** protection (optional) provide speed, high availability, and a memory capacity of up to **192GB**.
 - x3550 M3 servers using the **L5640, E5645, E5649** and **1333MHz X56xx** processors support 2 DIMMs per channel (2DPC) at 1333MHz (running at 1.5V).
 - Optional **50GB solid-state drives (SSD)** use only **2W** of power per drive, vs. **9-10W** for 2.5-inch HDDs. This is as much as **80%** less power than a 2.5-inch HDD would use (with a corresponding reduction in heat output).
 - The altimeter works in conjunction with IMM to **govern fan rotation**, which can help **save money at lower altitudes** because the fans do not have to spin at high speed.
 - Two **high-speed PCIe x16 adapters (Gen 2) slots** offer investment protection by supporting high-performance adapters, such as 10Gb Ethernet, Fibre Channel and InfiniBand™ cards, none of which will run in older 33MHz and 66MHz conventional PCI slots.
 - The integrated **ServeRAID-BR10iL v2** controller (model-specific) provides **RAID-0/1/1E** and full-duplex (**bidirectional 3Gbps**) data transfers for SAS/SATA/SSD drives without consuming a valuable adapter slot. Other server models include the **6Gbps ServeRAID-M1015 (RAID-0/1/10)**, optional **5/50** with **Self-Encrypting Disk, or SED**, the **6Gbps ServeRAID-M5014** controller, which provides **RAID-0/1/10/5/50** with **256MB** cache and optionally **6/60** with **SED** and optional **battery backup**, or the **6Gbps ServeRAID-M5015** controller, which provides **RAID-0/1/10/5/50** with **512MB** of battery-backed cache (except CTO models) and optionally **6/60** with **SED**.
 - Up to **8 2.5-inch hot-swap SAS/SATA** hard disk drives offer high-performance with high availability. **SSDs** offer even higher availability, with extremely high IOPS rates.
 - The integrated **dual-port Gigabit Ethernet** controller with **IPMI 2.0** provide high-speed network communications. Two more NICs can be added to the planar with an additional dual-port Gb Ethernet daughtercard. The TCP Offload Engine (**TOE**) feature offers higher performance for TCP/IP traffic, with less overhead on the system processor.
 - A **high degree of device integration**—including SAS/SATA HDDs or SSDs, multiple ServeRAID options, Gigabit Ethernet ports, systems management and video controllers—lowers costs and frees up valuable adapter slots.
 - Energy-efficient components, including DDR3 memory, low-voltage transistors and voltage regulator modules, and power supplies that are up to **90%** efficient (model-specific), help keep your energy bills down.
-

² All models require Chipkill-enabled DIMMs (provided standard) for Chipkill protection.

Flexibility

The x3550 M3 has the ability to grow with your application requirements, thanks to

- A choice of **4-core** or **6-core** processors with **1.6 to 3.6GHz** clock rates, up to **6.4 gigatransfers per second**, and **40W to 130W** maximum power draw.
- Up to **192GB** of high-speed registered **DDR3** system memory.
- A choice of either **1.5V** DIMMs, or **1.35V** DIMMs that consume **20% less energy**.
- A choice of power supplies, including **460W**, **675W AC or DC**, or **energy-efficient 675W**.
- **Two available high-performance PCIe x16** adapter slots in all models. Optionally, one riser card supporting PCI-X/133 adapters can be exchanged for one PCIe slot.
- Upgrading to the **ServeRAID-M5015** controller provides **512MB** of battery-backed cache to enable higher-performance hardware RAID support, and allows the x3550 M3 to offer **five** RAID levels standard: **RAID-0/1/10/5/50** (and optionally **6/60** with **SED**).
- The **five USB 2.0** ports (two front, two rear, one internal) are up to **40X** faster³ than older **USB 1.1** ports. This provides speedy access to external HDDs (non-arrayed), optical drives, tape drives, and other USB devices. Two ports are on the front of the unit and two are on the back. The internal port supports a flash drive with embedded hypervisor.
- A choice of up to **eight 2.5-inch hot-swap SAS/SATA** HDDs or **solid-state drives**, or **four** 2.5-inch drives and **one** internal optical drive, offer a variety of storage options. The SAS and SATA HDD models provide a maximum of **8TB** of internal **hot-swap** storage. The x3550 M3 supports a mix of hot-swap SAS, SATA and SSD drives.
- Alternatively, direct-attach, network-attached storage (NAS), or iSCSI or Fibre Channel-attached storage can be attached using IBM **System Storage™** servers.

Manageability / Security

Powerful systems management features simplify local and remote management of the x3550 M3:


- The x3550 M3 includes an **Integrated Management Module (IMM)** to monitor server availability, perform Predictive Failure Analysis, etc., and trigger IBM **Systems Director** alerts. The IMM performs the functions of both the Baseboard Management Controller (**BMC**) of earlier systems and the **Remote Supervisor Adapter II** and is upgradeable to **remote presence/cKVM**.
- An optional Virtual Media Key provides additional systems management capabilities, including Web-based out-of-band control; virtual floppy and optical drive support; Windows "blue screen" error capture; LDAP and SSL support; and remote redirection of PCI video, text, keyboard and mouse (cKVM). And it does all this without consuming a valuable adapter slot.
- Integrated industry-standard Unified Extensible Firmware Interface (**UEFI**) next-generation BIOS. New capabilities include:
 - Human readable event logs – no more beep codes
 - Complete setup solution by allowing adapter configuration function to be moved into UEFI
 - Complete out-of-band coverage by Advance Settings Utility to simplify remote setup
- Integrated **Trusted Platform Module (TPM) 1.2** support.
- Integrated **IPMI 2.0** support alerts IBM Systems Director to anomalous environmental factors, such as voltage and thermal conditions. It also supports **highly secure remote power control** using data encryption.
- **Text Console Redirection** support allows the administrator to remotely view x3550 M3 text messages over Serial or LAN.
- **IBM Systems Director 6.1x** is included for proactive systems management. IBM Systems Director comes with a portfolio of tools, including **IBM Systems Director Active Energy Manager™**, **Service and Support Manager**, and others. In addition, IBM Systems Director offers extended systems management tools for additional server management and increased availability. When a problem is encountered, IBM Systems Director can issue administrator alerts via e-mail, pager, and other methods.
- **IBM Systems Director Active Energy Manager™**, an IBM-exclusive, is designed to take advantage of new system power management features, by providing actual realtime energy monitoring, reporting, and capping features.

³ Data transfer rates may be less than the maximum possible.

Availability and Serviceability

The x3550 M3 provides many features to simplify serviceability and increase system uptime:

- x3550 M3 servers offer **Chipkill** ECC memory protection⁴ (when using x4 DIMMs). Chipkill memory is up to **16X** better than standard ECC memory at correcting memory errors. This can help reduce downtime caused by memory errors.
- The x3550 M3 offers selectable **memory mirroring** for redundancy in the event of a noncorrectable memory failure
- **Toolless cover removal** provides easy access to upgrades and serviceable parts such as HDDs and memory. Similarly, the Virtual Media Key and the ServeRAID controller can be installed and replaced without tools. This means less time (and therefore less money) spent servicing the x3550 M3. Similarly, **hot-swap/redundant HDDs, fan modules and power supplies**, as well as **online mirrored** memory, mean greater system uptime while these components are being serviced.
- New **toolless slides** ship with the server, together with a **Cable Management Arm (CMA)**, that allows the rack server to easily slide into place
- **IBM Thermal Diagnostics** allows the administrator to evaluate thermal data on the server without taking the hardware offline. This can provide greater server uptime.
- The **drop-down light path diagnostics panel** and individual light path LEDs quickly lead the technician to failed (or failing) components. This simplifies servicing, speeds up problem resolution and helps improve network availability.
- **Integrated** 3Gbps or 6 Gbps RAID controller to enhance system availability and data protection without using a valuable PCIe slot.
- **IPMI 2.0** supports highly secure remote system power control using data encryption. This allows an administrator to restart a server without having to visit it in person, saving travel time and getting the server back up and running quickly and securely. It also adds new features to those provided by IPMI 1.5, including **VLAN** support, **Serial over LAN**, enhanced authentication and encryption algorithms (**RMCP+** and **AES**) and a **firmware firewall**.
- **Altitude- and temperature-controlled fans** adjust to compensate for changing thermal characteristics. At the lower speeds they draw less power and suffer less wear. Equally important in a crowded data center, temperature-controlled fans produce less ambient noise in the data center than if they were constantly running at full speed.
- The **three-year (parts and labor) limited onsite warranty**⁵ helps afford you peace of mind and greater investment protection than a one-year warranty does.



Key Features

High-Performance / High-Efficiency Xeon 5600 Series Processors

The x3550 M3 supports up to two high-performance Intel **Xeon 5600** series processors, allowing you to upgrade to a second processor as your business needs require. The x3550 M3 offers a choice of processor clock rates, memory access speeds and energy draw, including:

- **130W 6-core** Xeon 5600 model **X5690** running at 3.46GHz, with impressive performance/watt (**21.67W** per core; **6.4GTps** QPI speed), **12MB** of L3 processor cache, **1333MHz** memory access, 2 threads per core, and Intel Turbo Boost technology
- **95W 6-core** Xeon 5600 models **X5675** or **X5650** running at 3.06 or 2.66GHz, respectively, with reduced draw and impressive performance/watt (only **15.83W** per core; **6.4GTps** QPI speed), **12MB** of L3 processor cache, **1333MHz** memory access, 2 threads per core, and Intel Turbo Boost technology
- **80W 6-core** Xeon 5600 models **E5649** or **E5645** running at 2.53 or 2.4GHz, respectively, with reduced power draw and impressive performance/watt (only **13.33W** per core; **5.86GTps** QPI speed), **12MB** of L3 processor cache, **1333MHz** memory access, 2 threads per core, and Intel Turbo Boost technology
- **60W 6-core** Xeon 5600 **low-voltage** model **L5640** running at 2.26GHz, respectively, with low power draw and impressive performance/watt (only **10W** per core; **5.86GTps** QPI speed), and **12MB** of shared L3 cache, **1333MHz** memory access, 2 threads per core, and Intel Turbo Boost technology
- **80W 4-core** Xeon 5600 models **E5620** running at 2.4GHz, respectively, with reduced power



⁴ Chipkill protection is supported with x4 DDR3 DIMMs, but not x8 DIMMs.

⁵ For terms and conditions or copies of the IBM Statement of Limited Warranty, call 800-772-2227 in the U.S. In Canada call 800-426-2255. Telephone support may be subject to additional charges. For warranties including onsite labor, a technician is sent after IBM attempts to resolve the problem remotely. International warranty service is available in any country in which this product is sold.

draw and impressive performance/watt (**20W** per core; **5.86GTps** QPI speed), **12MB** of L3 processor cache, **1066MHz** memory access, 2 threads per core, and Intel Turbo Boost technology

- **80W** 4-core Xeon 5600 models **E5607** or **E5606** running at 2.26 or 2.13GHz, respectively, with reduced power draw and impressive performance/watt (**20W** per core; **4.8GTps** QPI speed), **8MB** of L3 processor cache, and **1066MHz** memory access
- **80W** 4-core Xeon 5600 models **E5603** running at 1.6GHz with reduced power draw and impressive performance/watt (**20W** per core; **4.8GTps** QPI speed), **4MB** of L3 processor cache, and **1066MHz** memory access

Also available, via configure-to-order (CTO):

- **130W** 4-core Xeon 5600 model **X5687** running at 3.6GHz, with impressive performance (**32.5W** per core; **6.4GTps** QPI speed), **12MB** of L3 processor cache, **1333MHz** memory access, 2 threads per core, and Intel Turbo Boost technology
- **95W** 4-core Xeon 5600 model **X5672** running at 3.2GHz, with reduced draw and impressive performance/watt (**23.75W** per core; **6.4GTps** QPI speed), **12MB** of L3 processor cache, **1333MHz** memory access, 2 threads per core, and Intel Turbo Boost technology
- **95W 6-core** Xeon 5600 model **X5660** running at 2.8GHz, with reduced draw and impressive performance/watt (only **15.83W** per core; **6.4GTps** QPI speed), **12MB** of L3 processor cache, **1333MHz** memory access, 2 threads per core, and Intel Turbo Boost technology
- **130W** 4-core Xeon 5600 model **X5647** running at 2.93GHz with impressive performance (**32.5W** per core; **5.86GTps** QPI speed), **12MB** of L3 processor cache, **1066MHz** memory access, 2 threads per core, and Intel Turbo Boost technology
- **40W** 4-core Xeon 5600 **low-voltage** model **L5630** running at 2.13GHz, with extremely low power draw and amazing performance/watt (only **10W** per core; **5.86GTps** QPI speed), **12MB** of L3 processor cache, **1066MHz** memory access, 2 threads per core, and Intel Turbo Boost technology
- **40W** 4-core Xeon 5600 **low-voltage** model **L5609** running at 1.86GHz, with extremely low power draw and amazing performance/watt (only **10W** per core; **4.8GTps** QPI speed), **12MB** of L3 processor cache, and **1066MHz** memory access

With the Xeon 5600 series processors, Intel has diverged from its traditional Symmetric Multiprocessing (SMP) architecture to a Non-Uniform Memory Access (NUMA) architecture. The processors are connected through serial coherency links called QuickPath Interconnect (QPI). QPI is capable of 6.4, 5.86 or 4.8 GTps (gigatransfers per second), depending on the processor model.

4-core Xeon processors contain *four complete processor cores*; **6-core** processors, similarly, contain *six* cores. Each 5600 series processor contains one **256KB L2** cache **per** core and one **12MB L3** cache shared by all the cores. The shared cache is dynamically allocated between the cores as needed. The multiple cores appear to software as multiple physical processors. The 2-core processors offer considerably higher performance than a same-speed Xeon processor with a single core. Likewise, 4-core processors offer considerably higher performance than a same-speed Xeon processor with 2 cores.

Turbo Boost Technology increases performance by translating the temperature, power and current head room into higher frequency. It will dynamically increase by 133MHz for short and regular intervals until the upper limit is met or the maximum possible upside for the number of active cores is reached. The maximum frequency is dependent on the number of active cores. The amount of time the processor spends in the Turbo Boost Technology state depends on the workload and operating environment, providing the performance you need, when and where you need it. For example, a **3.46GHz 6-core X5690** processor with **3-6** cores active can run the cores at **3.6GHz**. With only **one** or **two** cores active, the same processor can run those cores at **3.73GHz**. Similarly, a **3.6GHz 4-core X5687** processor can run at **3.73GHz** or even **3.86GHz**. When the inactive cores are needed again, they are dynamically turned back on and the processor frequency is adjusted accordingly.


In processors implementing **Intel Hyper-Threading Technology**, each core has two threads capable of running an independent process. Thus, a 6-core processor can run **12** threads concurrently.

Intelligent Power Capability powers individual processor elements on and off as needed, to reduce power draw.

Execute Disable Bit functionality can help prevent certain classes of malicious buffer overflow attacks when combined with a supporting operating system.


Intel's **Virtualization Technology** (VT) integrates hardware-level virtualization hooks that allow operating system vendors to better utilize the hardware for virtualization workloads.

DDR3 Memory with Chipkill ECC Protection



The x3550 M3 ships with registered double data rate III (DDR3) memory and provides Active Memory features, including advanced **Chipkill** memory protection (using x4 DIMMs), for **up to 16X** better error correction than standard ECC memory. In addition to offering better performance than DDR2 or fully-buffered memory, DDR3 memory also uses less energy. DDR2 memory already offered up to 37% lower energy use than fully buffered memory. Now, a generation later, DDR3 memory is even more efficient, using up to **15% less energy** than DDR2 memory.

The x3550 M3 currently supports up to **144GB** of **RDIMM** (registered DIMM) memory in **18** DIMM slots (**192GB** in **12** slots), or up to **48GB** of **UDIMM** (unbuffered DIMM) memory in **12** slots. The x3550 M3 also supports either energy-efficient **1.35V** DIMMs or standard **1.5V** DIMMs. Redesign in the architecture of the Xeon 5500 and 5600 series processors bring radical changes in the way memory works in these servers. For example, the Xeon 5500 and 5600 series processors **integrate the memory controller inside the processor**, resulting in two memory controllers in a 2-socket system. Each memory controller has three memory channels. Depending on the type of memory, population of memory, and processor model, the memory may be clocked at **1333MHz**, **1066MHz** or **800MHz**.

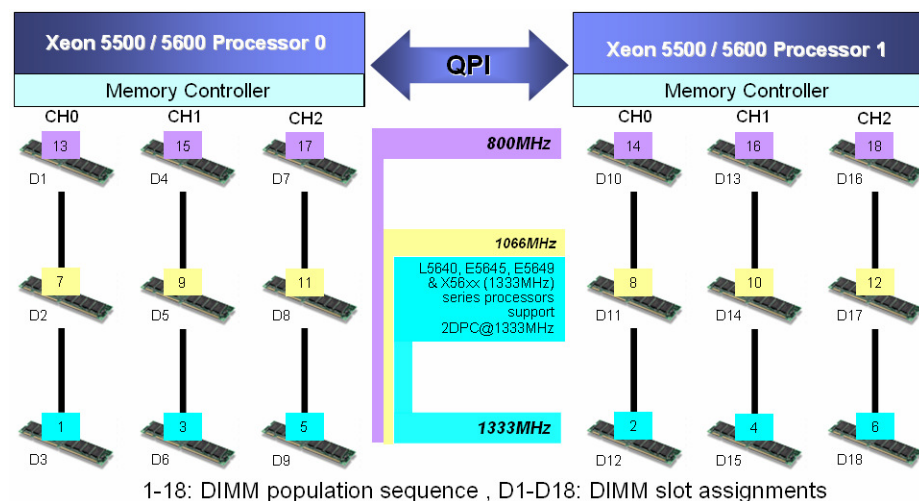

Note: If only one processor is installed, only the first nine DIMM slots can be used. Adding a second processor not only doubles the amount of memory available for use, but also doubles the number of memory controllers, thus doubling the system memory bandwidth. If you add a second processor, but no additional memory for the second processor, the second processor would have to access the memory from the first processor "remotely," resulting in longer latencies and lower performance. The latency to access remote memory is almost **75% higher** than local memory access. So, the goal should be to always populate both processors with memory.

The 1333MHz **E56xx**, **L5640**, and **X56xx** processor models support up to **1333MHz** memory clock speed and 2 DIMMs per channel (2DPC) at 1333MHz with single-rank and dual-rank RDIMMs and UDIMMs running at 1.5V. Other processors access memory at **1066MHz**.

Using 1333MHz memory (where supported) versus 1066MHz DIMMs offers up to **9%** better performance, while 1066MHz memory produces up to **28%** better performance than 800MHz memory. Xeon 5550/5600 series processors access memory with almost **50% lower latency** than the earlier 5400 series processors. That can result in faster processing of latency-sensitive workloads.

Regardless of memory *speed*, the Xeon 5600 platform represents a significant improvement in memory *bandwidth* over the previous Xeon 5400 platform. At 1333MHz, the improvement is almost **500%** over the previous generation. This huge improvement is mainly due to the dual integrated memory controllers and faster DDR3 1333MHz memory. Throughput at 800MHz is **25 gigabytes per second (GBps)**; at 1066MHz it's **32GBps**; and at 1333MHz it's **35GBps**. This improvement translates into improved application performance and scalability.

Memory interleaving refers to how physical memory is interleaved across the physical DIMMs. A balanced system provides the best interleaving. A Xeon 5500/5600 processor-based system is balanced when all memory channels on a socket have the same amount of memory.

The Xeon 5600 series processors support single-, dual-, and quad-rank memory. A memory rank is simply a segment of memory that is addressed by a specific address bit.

A typical memory DIMM description is 8GB 2Rx4 DIMM:



- The 2R designator is the rank count for this particular DIMM (2R = dual-rank)
- The x4 designator is the data width (in bits) of the rank

It is important to ensure that DIMMs with the appropriate number of ranks are populated in each channel for optimal performance. Whenever possible, **use dual-rank DIMMs** in the system. Dual-rank DIMMs offer better interleaving and hence better performance than single-rank DIMMs. For instance, a system populated with six 2GB *dual-rank* DIMMs outperforms a system populated with six 2GB *single-rank* DIMMs by **7%** for SPECjbb2005. Dual-rank DIMMs are also better than quad-rank DIMMs because **quad-rank DIMMs will cause the memory speed to be down-clocked**.

Another important guideline is to populate equivalent ranks per channel. For instance, **mixing one single-rank DIMM and one dual-rank DIMM in a channel should be avoided**.

Notes: It is important to populate all three memory channels in each processor. The relative memory bandwidth decreases as the number of channels populated decreases. This is because the bandwidth of all the memory channels is utilized to support the capability of the processor. So, as the channels are decreased, the burden to support the requisite bandwidth is increased on the remaining channels, causing them to become a bottleneck. RDIMMs and UDIMMs **cannot** be used in the same server. If 1.5V and 1.35V DIMMs are mixed, *all* DIMMs will run at 1.5V.

In addition to Chipkill error correction, the x3550 M3 offers an additional level of IBM Active Memory protection: **memory mirroring**.

Memory mirroring works much like disk mirroring. The total memory is divided into three channels: a primary channel, a backup channel, and an unused channel. Data is *written concurrently to both the primary and backup channels*. If a DIMM fails in one of the DIMMs in the primary channel, it is instantly disabled and the mirrored memory in the backup channel becomes active (primary) until the failing DIMM is replaced. One-third of total memory is available for use at any one time with mirroring enabled. (**Note:** Due to the double writes to memory, performance is affected.) Because the third channel is disabled with mirroring active, there is no point in populating it with memory.

Mirroring is handled at the hardware level; no operating system support is required.

DDR3 memory is currently available in **2GB, 4GB, 8GB** and **16GB** RDIMMs, as well as **2GB** and **4GB** UDIMMs. DIMMs are installed individually (not in pairs). However, for performance reasons, in a 2-processor system, it's best to install a DIMM per processor.

Maximum memory capacity and speed in 2-processor configurations include:

Memory Frequency	DIMMs per Channel	Max. Memory Capacity	5600 Series
1333MHz	1 (6 DIMMs)	48GB RDIMM 24GB UDIMM	1333MHz E56xx, L5640, and X56xx
1333MHz	2 (12 DIMMs)	96GB RDIMM 48GB UDIMM	1333MHz E56xx, L5640, and X56xx
1066MHz	2 (12 DIMMs)	96GB RDIMM 48GB UDIMM	E560x, E5620, L5609, L5630, and X5647
800MHz	3 (18 DIMMs)	144GB RDIMM	All
800MHz	2 (12 DIMMs)	192GB RDIMM	All
800MHz- 1333MHz	2 (8 DIMMs)	64GB RDIMM 16GB UDIMM	All

Integrated Virtualization

All models of the x3550 M3 support a **USB 2.0 Flash Key** installed preloaded with **VMware vSphere Hypervisor** (formerly ESXi). Rather than management through a Service Console based on a Linux operating system, vSphere Hypervisor relies on aggregate management tools, including VirtualCenter, the Remote Command Line interface and the introduction of CIM for standards-based and agentless hardware monitoring.

vSphere Hypervisor includes all the performance, scalability and compatibility features of a hypervisor installed on disk, including full **VMFS** support across FC SAN, iSCSI SAN, and NAS, and **4-way VSMP**. Because it runs from flash memory, it's extremely fast and ideal for diskless configurations. It also offers enhanced security, because it runs without an operating system-based console and is updated/patched much like firmware.



Disk Controllers

All x3550 M3 models include a **ServeRAID-BR10il v2**, **ServerRAID-M1015**, **ServeRAID-M5014** or **ServeRAID-M5015** SAS/SATA controller standard (model-dependent) to enhance system availability and data protection without using a PCI slot.

The 3Gbps⁶ (x4 PCIe) **ServeRAID-BR10il v2** controller offers hardware **RAID-0/1/1E** support (no cache) for up to 4 HDDs or SSDs.

The **6Gbps** (x8 PCIe) **ServeRAID-M1015 SAS/SATA** controller supports **RAID-0/1/10** (no cache) for up to 32 drives (limited to available drive bays). The **IBM ServeRAID M1000 Series Advance Feature Key** adds **RAID-5/50** with **SED** support.

The **6Gbps** (x8 PCIe) **ServeRAID-M5014 SAS/SATA** controller offers enhanced performance with **256MB** of cache memory, and supports **RAID-0/1/10/5/50** for up to 32 drives (limited to available drive bays).

The **6Gbps** (x8 PCIe) **ServeRAID-M5015 SAS/SATA** controller offers enhanced performance with **512MB** of cache memory and battery backup⁷, and supports **RAID-0/1/10/5/50** for up to 32 drives (limited to available drive bays).

For external storage, the **6Gbps ServeRAID-M5025** controller enables connection to external IBM System Storage expansion units (up to 240 HDDs), as well as support for up to 8 internal HDDs (system limit). It provides RAID-0/1/10/5/50 support, **512MB** of onboard cache, and battery backup standard.

The **IBM ServeRAID M5000 Series Advance Feature Key** adds **RAID-6/60** with **SED** support to the M5014, M5015, or M5025. The **IBM ServeRAID M5000 Series Battery Key** adds **battery backup** support to the M5014 and CTO systems containing an M5015 or M5025.



Drive Bays

The x3550 M3 supports up to **8** drive bays. Base models include **4 2.5-inch** drive bays. Optionally, add **one 5.25-inch** bay for an optional DVD-RW drive, or (using an expansion kit) increase the number of 2.5-inch bays to 8. However, these upgrades are mutually exclusive. Upgrading from 4 2.5-inch drive bays to 8 2.5-inch drive bays would require removal of the 5.25-inch bay, if present. The 2.5-inch bays support a combination of SATA and SAS HDDs, as well as solid-state drives (SSDs).

Hot-swap drives may be inserted or removed through the front of the server without powering off the system. **Simple-swap** solid-state drives can be inserted or removed through the front of the server as well; however, the system power must first be turned off.

For additional storage, a direct-attach, NAS or SAN external expansion option can be added, using an optional controller.

No diskette drive is supplied with any model; an external USB floppy drive may be used, if needed.

Flexible Internal Storage

The x3550 M3 offers flexibility with **4 2.5"** HDD bays standard and optionally **8 2.5"** HDD bays, supporting high-performance drives that provide high density/high reliability and allow you to scale up as your business grows.

2.5-inch Hot-Swap SAS

- **7,200 RPMs** — **500GB** or **1TB**⁸ (**4TB** maximum capacity with **4** bays / **8TB** with **8** bays)
- **10,000 RPMs** — **73.4**, **146.8**, **300** or **600GB** (**2.4TB** / **4.8TB**)
- **15,000 RPMs** — **73.4** or **146.8GB** (**576GB** / **1.17TB**)

2.5-inch Hot-Swap SATA

- **7,200 RPMs** — **160**, **250**, or **500GB**, or **1TB** (**4TB** / **8TB** maximum)
- **10,000 RPMs** — **300GB** (**1.2TB** / **2.4TB**)

2.5-inch HDDs not only require less space than 3.5-inch drives, they *weigh less, consume half the power, produce less noise, seek faster, and offer increased reliability.*

2.5-inch Hot-Swap or Simple-Swap SSDs

- **50GB** High IOPS (**200GB** / **400GB** maximum)
 - ❑ **High I/O Performance**



⁶ Data transfer rates depend on many factors and are often less than the maximum possible.

⁷ Battery backup is included when the adapter is purchased as an option or when included in standard server models. It is optional when the adapter is included in a CTO system.

- Offers up to 8X more IOPS than HDDs (67/33% read/write OLTP transaction base mix)
- Optimized for heavy mix of read and write operations, such as transaction processing, media streaming, surveillance, file copy, logging, backup/recovery, and business Intelligence

❑ **Lower-Cost IOPS Performance**

- Yields better \$/IOPS: lower capacity (GB) required to achieve higher IOPS
- Uses less energy and generates less heat than a hard disk drive

❑ **Superior Uptime**

- 3X the availability of mechanical disk drives
- No moving parts to fail
- Enterprise wear-leveling to extend life even further

❑ **Full OS Support**

- Supports all ServerProven OSes

The hot-swap SAS drives use the Converged Tray for interchangeability with other IBM System x[®] systems. If you need more storage space, terabyte capacities are possible with external IBM System Storage direct-attach, NAS and SAN offerings.



High-Performance Adapter Slots

The x3550 M3 provides **two x16** ("by 16") **16GBps PCIe Gen 2 (PCI Express) Gen 2** I/O slots for long-term investment protection. **PCI Express** Gen 2 is the next-generation of high-performance, low-latency, serial I/O bus. Each slot is capable of supporting **x1/x4/x8/x16** Gen 1 or Gen 2 adapters at full speed. One slot is **full-height, half-length**. The other is **low profile**. Each is convertible to one PCI-X/133 MHz using an optional riser. High-performance x16 Gen 2 slots are ideal for digital media, 2D graphics environments, and other I/O-intensive applications.

There is also a dedicated riser card in the x3550 M3 that provides a x8 PCIe connector wired with x4 lanes for an internal ServeRAID card.

Dual-Port Gigabit Ethernet Controller

The x3550 M3 includes **one dual-port** integrated **Broadcom 5709S** Gigabit Ethernet controller standard, for up to 10X higher maximum throughput than a 10/100 Ethernet controller, as well as support for **TOE** (TCP Offload Engine), as well as **load-balancing** and **failover** capabilities between the two ports.

TOE helps improve overall system performance by offloading TCP/IP protocol processing from the system microprocessor to the onboard Ethernet TOE processor.

It also supports highly secure remote power management using **IPMI 2.0**, plus **Wake on LAN[®]** and **PXE** (Preboot Execution Environment) flash interface. Optional PCI adapters offering failover and load balancing between adapters are available for added throughput and increased system availability.



Integrated quad Gb Ethernet ports:

- Up to four Gb Ethernet ports, ideal for virtualization and I/O-intensive workloads
- 2 ports standard, plus two additional ports via optional daughtercard
- Improves system performance by offloading protocol processing from CPU to a separate TOE engine
- Primary performance improvement for data copying (CPU) where CPU utilization is 90-100%

The 5709S controller supports IEEE 802.3 for 1000Base-T, 100Base-TX, and 10Base-T applications (802.3, 802.3u, 802.3ab) through a RJ-45 connector to an Ethernet network over a CAT 5 twisted-pair cable. TOE support on Windows is available today, but requires the Windows Scalable Network Pack (SNP) installed. Linux has no plan to support TOE at this time.

10 Gigabit Ethernet Integrated Virtual Fabric Adapter for IBM

The Emulex Virtual Fabric Adapter for x3550 M3 (part number 49Y4200 with special riser card, support by CTO) is an industry-leading performance and scalability per watt, dual-port network adapter for 10Gbps Ethernet (10GbE) networks. It offers the benefits and flexibility of I/O convergence in a single end-to-end solution. Protocol offload for stateless TCP/IP and TCP Chimney provide maximum bandwidth with minimum use of CPU resources. It achieves line rate 10Gbps performance with support for TCP/IP stateless offloads and TCP Offload Engine (TOE) support. TOE reduces system processor utilization, providing increased system performance and

⁸ 1TB SAS and 250GB/1TB SATA drives available in 2Q/2011.

reducing overall system power requirements.

The Emulex 10Gb/s Virtual Fabric Adapter for IBM System x3550 M3 is based on the Emulex OneConnect Universal Converged Network Adapter (UCNA) platform that also includes the capability for future upgrades to Fibre Channel over Ethernet (FCoE) and iSCSI protocol offloads. By using a common infrastructure for Ethernet and storage networks, data centers can reduce capital expense (CapEx) for adapters, switches and cables, and operational expense (OpEx) for power, cooling and IT administration.

End-to-end data protection with hardware parity, CRC, ECC and other advanced error checking and correcting ensure that data is safe from corruption.

Integrated dual 10Gbps Ethernet ports:

- IPv4/IPv6 TCP, UDP checksum offload; Large Send Offload (LSO); Large Receive Offload; Receive Side Scaling (RSS); IPV4 TCP Chimney Offload
- VLAN insertion and extraction
- Jumbo frames up to 9000 Bytes
- Preboot eXecutive Environment (PXE) 2.0 network boot support
- Interrupt coalescing
- Load balancing and failover support including adapter fault tolerance (AFT), switch fault tolerance (SFT), adaptive load balancing (ALB), teaming support and IEEE 802.3ad.



Ultra-Efficient Cooling

Strategically located fans, combined with efficient airflow paths, provide highly effective system cooling for the x3550 M3, known as **Calibrated Vektored Cooling**. The base server with one power supply includes **one** hot-swap fan module, upgradeable to **six** modules, for redundant cooling. Each module includes two back-to-back fans with counterrotating blades. In addition, each power supply also contains a fan.

The system contains **three cooling zones**. **Zone 1** (incorporating two fan modules) cools all 18 DIMM sockets, **Zone 2** (two fan modules) cools the primary processor, and **Zone 3** (one or two fan modules) cools the second processor (if installed).

The fans automatically adjust speeds in response to changing thermal requirements depending on the zone and internal temperatures. When the temperature inside the server increases, the fans speed up to maintain the proper ambient temperature. When the temperature returns to a normal operating level, the fans return to their default speed. In addition, the **Bosch BMP085 altimeter** works in conjunction with IMM to govern fan rotation. At high altitudes the air is thinner and doesn't cool as well as at lower elevations. In most servers, the fans run fast all the time to allow for use at high elevations, wasting power. The altimeter allows the IBM fans to run at lower speeds at lower altitudes.

Why not simply run the fans at 100% capacity all the time? For several good reasons: to reduce the ambient noise, reduce the wear-and-tear on the fans and reduce the server power draw. The reduction in ambient noise and power draw may be relatively minor for a single server, but put dozens or hundreds in a data center and it can make a big difference!

In addition, the server uses **hexagonal ventilation holes** in the chassis. Hexagonal holes can be grouped more densely than round holes, providing greater airflow through the system cover.

This cooling scheme is important because newer, more powerful processors generate a significant amount of heat, and heat must be controlled for the system to function properly.

There are temperature sensors on the planar placed to sense DIMM exhaust temperature, SAS HDD exhaust temperature, and CPU2 exhaust temperature (through the altitude sensor).

Light Path Diagnostics

Light path diagnostics enables a technician to quickly identify and locate a failed or failing system component, such as a specific fan or memory DIMM. This enables quick replacement of the component, which helps increase server uptime and lower operating costs.

The front of the server has an LED indicator light to show possible component failures. If the front LED indicates an error condition, by pressing a button on the front of the server an LED panel will pop out and drop down for easy viewing without the need to open the server cover or remove the server from the rack. The light path diagnostics panel tells the servicer which component requires attention. In addition, many components have their own identifying LEDs. For example, each of the memory modules has an LED next to the socket, as do both processors, all adapter slots, all fan modules, all power supplies, the voltage regulator module and the service processor, allowing the servicer to easily identify exactly which component needs servicing. By following the "light path," the component can be replaced quickly, and without guesswork. (**Note:** In the event of a failed DIMM, the system will restart and mark the DIMM as bad while offline, thus allowing the system to continue running, with reduced memory capacity, until serviced.)

Hot-Swap/Redundant Components

System availability is maximized through the extensive use of hot-swap and redundant components, including:

- **Redundant memory protection** (with **Chipkill** protection, and **memory mirroring** enabled)
- **Hot-swap, redundant hard disk drives** and **solid-state drives** (with **RAID** protection)
- **Hot-swap, redundant power supplies**
- **Hot-swap, redundant cooling fan modules**

Other Features

- **Five USB 2.0 ports** — Provides flexibility to add high-speed external devices. The USB 2.0 specification supports up to 480Mbps transfer rates. (**Note:** Not all USB 2.0 devices are capable of achieving this rate.) Two ports are provided on the front of the server, two on the back, plus one USB connector reserved for a USB flash memory key containing an embedded hypervisor. For pre-boot and normal drive use, use the external ports.
- **Dual video ports** — To simplify local systems management, **one** video port is provided on the front of the unit and **one** on the back.
- **Toolless slides** — Allows quick rack installation and quicker upgrade and servicing of the server.
- **Toolless chassis** — The cover can be opened without tools, and many components can be removed and replaced without tools, including the optical drive, hot-swap HDDs, plus PCI, PCI-X and PCIe adapters, as well as the integrated ServeRAID card, embedded hypervisor key, and Virtual Media Key. This can save a servicer significant time.

Extensive System Support Features

The IBM services and technical support portfolio provides world-class, consistent, high-quality service and support. The x3550 M3 server offers a number of tools and services designed to make ownership a positive experience. From the start, IBM programs make it easier for you to plan for, configure and purchase System x servers, get them running and keep them running long-term. These features include IBM Express Portfolio, IBM ServerProven®, IBM Standalone Solutions Configuration Tool, IBM System x and BladeCenter Power Configurator, IBM ServerGuide, IBM Systems Director Service and Support Manager, Product Customization Services and extensive technical support offerings.



The IBM **ServerProven** program provides the confidence that specific options and operating systems have been tested on the server and are officially supported to work together. It is updated frequently to ensure that the latest compatibility information is always at your fingertips.

The IBM **Standalone Solutions Configuration Tool** (SSCT) is a downloadable tool that simplifies the often complex chore of configuring a full rack of servers (including blade servers) and confirming that you have all the cables, power distribution units, KVM (keyboard, video and mouse) switch boxes and other components you need, as well as the proper airflow clearances, electrical circuits and other environmental conditions.

IBM **System x and BladeCenter Power Configurator** helps IT managers plan for data center power needs, by providing the following information for specific configurations of System x and BladeCenter systems: *power input* (watts), *PDU sizing* (amps), *heat output* (BTUs), *airflow requirements through chassis* (CFM), *VA rating*, *leakage current* (mA), and *peak inrush current* (amps).

IBM **ServerGuide** (installed from CD) simplifies the process of installing and configuring System x servers. ServerGuide goes beyond mere hardware configuration by assisting with the automated installation of the Microsoft® Windows® Server 2003 and 2008 operating systems, device drivers and other system components, with minimal user intervention. (Drivers are also included for support of Novell NetWare, Red Hat Linux and SUSE LINUX.) This focus on deployment helps you reduce both your total cost of ownership and the complexity that administrators and technical personnel face.

IBM **Systems Director Service and Support Manager** (previously called IBM Electronic Service Agent™) is an innovative "call home" feature that allows System x and BladeCenter servers to automatically report hardware problems to IBM support, which can even dispatch onsite service if necessary to those customers entitled to onsite support under the terms of their warranty or an IBM Maintenance Agreement. Service and Support Manager resides on a server and provides electronic support and problem management capabilities through a highly secure electronic dialogue between your systems and IBM. It monitors networked servers for hardware errors and it can perform hardware and software inventories and report inventory changes to IBM. All information sent to IBM is stored in a highly secure database and used for improved problem determination.

Additional services include hardware warranty upgrades and factory-installed **Product Customization Services** (PCS), such as asset tagging, hardware integration, software imaging and operating systems personalization.

IBM offers extensive **technical support** by phone and via the Web. Support options include links to forums/newsgroups, problem submission, online shopping support, service offerings, device drivers for all IBM product lines, software downloads and even upcoming technical seminar worldwide schedules and registration. Also available are remote installation, configuration and usage support for System x hardware and software, as well as onsite custom services to provide the level of expertise you require.

IBM Maintenance and Technical Support solutions can help you get the most out of your IT investment by reducing support costs, increasing availability and simplifying management with integrated support for your multiproduct, multivendor hardware and software environment. For more information on hardware maintenance, software support, solution support and managed support, visit <http://ibm.com/services/maintenance>.

Advanced Systems Management Capabilities

The x3550 M3 has a high level of systems management capabilities that are well-suited to remote locations as well as to stand-alone environments. Features include UEFI, IMM, IBM ToolsCenter, IBM Systems Director Active Energy Manager, Automatic Server Restart, Wake on LAN[®] support, PXE support, text console redirect, Predictive Failure Analysis, and IBM Systems Director.

The **IMM** provides industry-standard **Intelligent Platform Management Interface (IPMI) 2.0**-compliant systems management. It provides a number of important system functions, including:

- Monitoring of system and battery voltage, system temperature, fans, power supplies, processor and DIMM status
- Fan speed control
- Product ID and Family ID detection
- Highly secure remote power on/off
- System reset control
- NMI/SMI detection and generation
- System diagnostic LED control (power, HDD, activity, alerts, heartbeat)
- IPMI over LAN
- Serial Over LAN
- Proxy server support
- LAN messaging and alerting
- Text console redirection over LAN
- Predictive Failure Analysis for system fans
- Web-based out-of-band control
- SSL (Secure Socket Layer) and LDAP (Lightweight Directory Access Protocol) support
- Enhanced authentication and encryption algorithms (RMCP+ and AES)
- VLAN support
- Local update of IMM firmware
- Firmware firewall
- Support for IPMI v2.0 compliant management software (e.g., xCAT)
- Other mandatory and optional IPMI IMM functions

The IMM alerts IBM Systems Director to anomalous environmental factors, such as voltage and thermal conditions—even if the server has failed.

The x3550 M3 also supports an optional IBM Virtual Media Key for additional systems management capabilities, including:

- Latest OS failure screen capture
- Graphical console redirection over LAN
- Remote virtual floppy and CD-ROM
- High-speed remote redirection of PCI video, keyboard and mouse

IBM **ToolsCenter** consolidates 42 needed tools for managing servers individually into an integrated suite of 8 tools. They are organized by function: deployment, updates, configuration and diagnostics. Tools are now simpler to access and use with a single webpage for access, a common look and feel and a common command line interface for the scripting tools. The ToolsCenter **Bootable Media Creator** offers significantly more functionality than past tools with

the ability to add more tools to the bootable image and to automatically download the bootable environment if needed. Bootable Media Creator allows you to create bootable CDs, DVD, and USB keys for updates customized to your systems.

IBM developed **IBM Systems Director Active Energy Manager** to put control of system power-saving features at the fingertips of administrators. Active Energy Manager is designed to take advantage of new features, such as monitoring power usage and balancing the performance of the system according to available power input. It provides the ability to plan and predict power consumption based on your hardware configuration. It also helps enable you to reduce the infrastructure required for redundancy, by using fewer servers on smaller power feeds and potentially lowering your overall data center support costs. It does this by inventorying all components, then adding up the total power draw and tracking the usage. It also includes power management features to help administrators manage or reduce power usage.

Automatic Server Restart (ASR) helps reduce downtime by restarting the server automatically in the event of a system lockup. ASR technology is a combination of hardware circuitry tied into the server's system reset function and a device driver. As long as the server continues running, the ASR watchdog timer will keep being reset, but if the operating system crashes or the hardware freezes somehow the ASR software will be unable to reset the hardware timer. If the timer is not reset within five minutes, it automatically triggers the ASR hardware, which immediately restarts the server (and logs an ASR event with IBM Systems Director). These features are designed so that *no more than five minutes can pass before the server is restarted*.

Wake on LAN permits the server to be remotely powered on if it has been shut off. Once powered up, the server can be controlled across the network, using the **Preboot Execution Environment (PXE)**.

Like Wake on LAN, **PXE** is system firmware. It enables software such as the optional **IBM Remote Deployment Manager** to take control of a system before the BIOS, operating system or applications are loaded (using Wake on LAN/PXE) and lets an administrator perform many low-level tasks remotely that would otherwise require a visit to each system. These tasks may include such things as formatting a hard disk drive, updating system firmware, or deploying a Windows or Linux operating system.

Text Console Redirection support allows the administrator to remotely view x3550 text messages over serial or LAN. An optional upgrade to the Virtual Media Key adds graphical console redirection.

Predictive Failure Analysis (PFA) is designed to allow the system to detect impending failure of supported components (processors, memory, HDDs, voltage regulator modules (VRMs), power supplies and fans) *before* actual failure, and alert the administrator through IBM Systems Director. This gives you the ability to *replace* the failing component *before* it fails, resulting in increased uptime.

IBM Systems Director software for advanced workgroup management is included with the x3550 M3. IBM Systems Director comes with a portfolio of tools, including **IBM Systems Director Active Energy Manager**, **Service and Support Manager**, and others. Others are available as add-ons for additional server management and increased availability. IBM Systems Director provides a single uniform graphical interface for all of these systems management functions.

IBM Systems Director enables you to customize thresholds and monitor system components (for things like temperature, voltage regulation, etc.) to help maximize uptime.

Key Options

IBM options for System x servers help you take your servers to a higher level

You know can rely on System x options to supply a complete solution for your business needs. Options help you create an optimized server system to meet your data protection, storage and availability needs. Every IBM option is designed and tested for peak performance and flexibility, helping to maximize your return on investment. The combination of System x servers and options lets you keep your fingers on the pulse of your e-business.

Processors —Intel Xeon processors provide high clock rates, 4 or 6 cores, and advanced features for performance, availability and power management. Large cache size, combined with fast **1333MHz, 1066MHz or 800MHz** memory access and an integrated memory controller reduce memory latency and facilitate the movement of data. (**Note:** System performance depends not only on the number of processors in the server but also on the frequency and functionality of each processor.) Adding a second processor may be a cost-effective way to achieve significant performance improvements.

Memory — Memory is a major factor in systems application performance. Adding more memory to a System x server is one of the most effective ways to increase application performance. For best performance in a server with a **4-core** processor, there should be twice as much memory as for a 2-core processor. A **6-core** processor should have three times as much memory as a 2-core processor.

Hard Disk Drives — IBM hard disk drives help you improve the transaction and cost performance of your System x servers. The choice of hard disk drives can be a critical aspect of maximizing the I/O throughput of the system. 2.5-inch **SAS** hard disk drives are available for the x3550 M3 with capacities of up to **1TB** at **7,200 RPMs**, up to **600GB** at **10K RPMs**, and up to **146.8GB** at **15,000 RPMs**. 2.5-inch **SATA** HDDs are available in capacities up to **1TGB** at **7,200 RPMs** and **300GB** at **10K RPMs**.

Solid State Drives — IBM solid-state drives offer high **IOPS** (I/O operations per second) performance and the ultimate in reliability, with 3X the MTBF (mean time between failure) rate of enterprise HDDs. IBM SSDs are available in **50GB** capacities. They can be used as a highly available boot drive, for storing disk images, or for other uses that stress read performance.

Power Supply — The optional second power supply for the x3550 M3 enables redundancy for hot-swap power. Its design, up to **95%-efficient**, helps lower your energy bill for power and cooling.

Virtual Media Key — The x3550 M3 includes a plethora of systems management features built-in; however, sometimes additional management capability is needed. In those situations, the Virtual Media Key not only offers powerful new features, it does so without taking up a valuable PCI-X or PCIe adapter slot, instead using a dedicated slot on the motherboard.

ServeRAID Controllers — System x servers using ServeRAID technology allow companies to build a reliable foundation for business-critical computing. IBM ServeRAID technology allows an array consisting of multiple physical hard disk drives to be treated as one logical drive. ServeRAID technology also allows data to be stored redundantly, across multiple hard disk drives—enhancing both the integrity and the availability of the data. SAS and SATA ServeRAID controllers offer enhanced performance due to onboard processors and cache. Because IBM ServeRAID controllers can help significantly improve data transfer rates, this technology is extremely effective when implementing demanding, transaction-oriented applications. By employing the advanced fault tolerance of IBM ServeRAID technology, companies can effectively implement networked business systems that require large amounts of storage space for data and applications that must be available for their businesses to continue operating.


The **ServeRAID-BR10iL v2 SAS/SATA Controller** offers **RAID-0/1/1E** support, with up to **3Gbps** per SAS port. The IBM **ServeRAID-M1015**, x8 PCIe and **6Gbps**, offers RAID-0/1/10; optionally RAID-5/50 with **SED** support. The IBM **ServeRAID-M5014**, x8 PCIe and **6Gbps**, provides **256MB** cache and RAID-0/1/10/5/50; optionally RAID-6/60 with SED, and battery backup). The IBM **ServeRAID-M5015**, x8 PCIe and **6Gbps**, includes **512MB** of battery-backed cache standard and RAID-0/1/10/5/50; optionally RAID-6/60 with SED. For external storage, the **ServeRAID-M5025** controller provides **RAID-0/1/10/5/50** support and **512MB** of onboard cache and enables connection to up to four IBM System Storage SAS/SATA expansion units (240 HDDs total). The **IBM ServeRAID M1000 Series Advance Feature Key** adds **RAID-5/50** and **SED** support to the ServeRAID-M1015. Similarly, the **IBM ServeRAID M5000 Series Advance Feature Key** adds **RAID-6/60** with **SED** support to the M5014, M5015, and M5025. The **IBM ServeRAID M5000 Series Battery Key** adds **battery backup** support to the M5014 and CTO servers containing an M5015 or M5025.

External Storage — The IBM **System Storage EXP810** expansion unit, as well as the **DS3000**, **DS4000**, and **DS8000** Series storage subsystems and **N3000**, **N5000**, **N6000**, and **N7000** NAS systems comprise a powerful and broad shared storage family with integrated management software designed to meet midrange and enterprise needs.

External SAN, iSCSI, and direct-attach storage is available using one of several IBM System Storage host bus adapters. External LAN-attached tape storage is available.


IBM System x3550 M3 Images

Front View

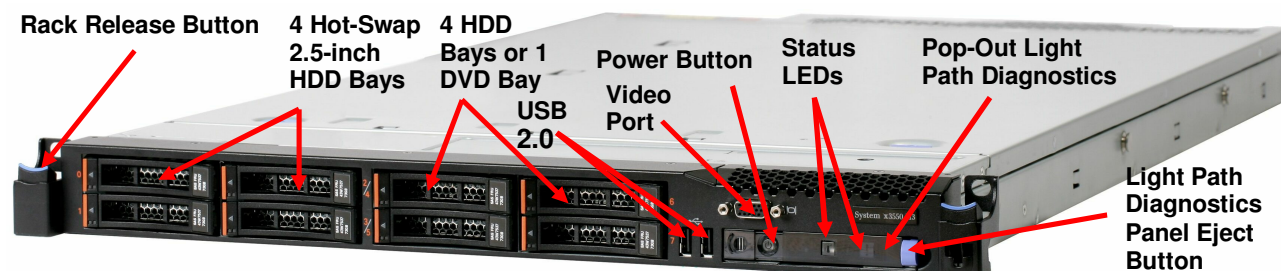


Leadership enterprise server with significantly lower cost of ownership in a highly available and expandable, rack-dense, 1U dual-socket server

Inside View

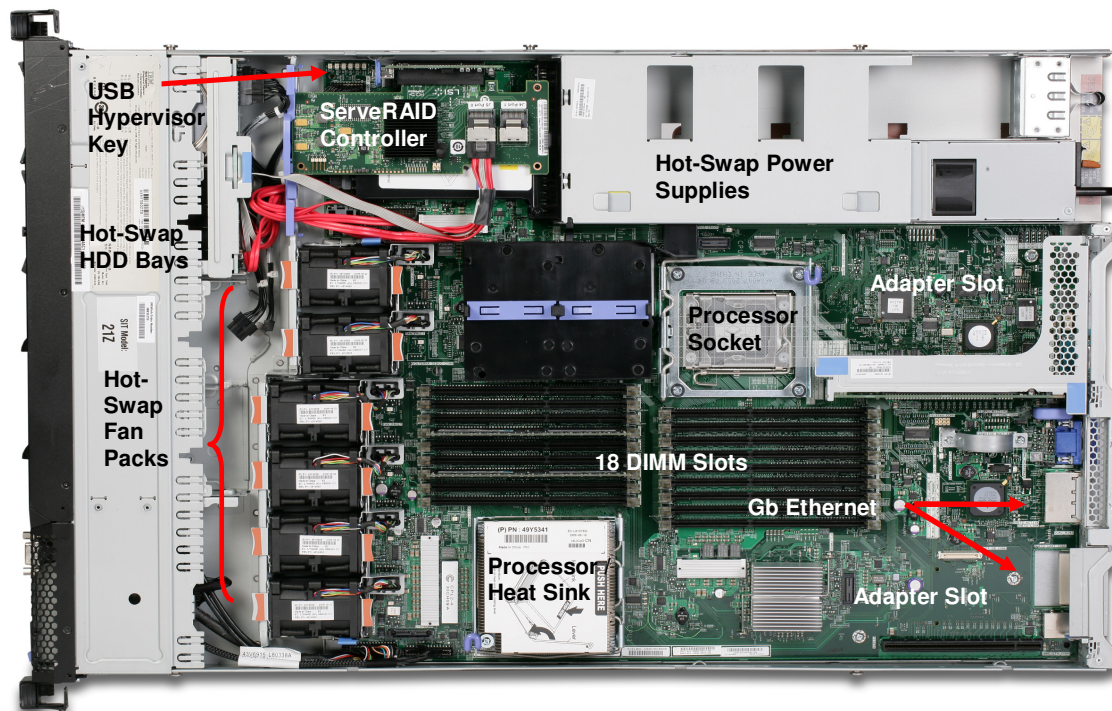

Rear View

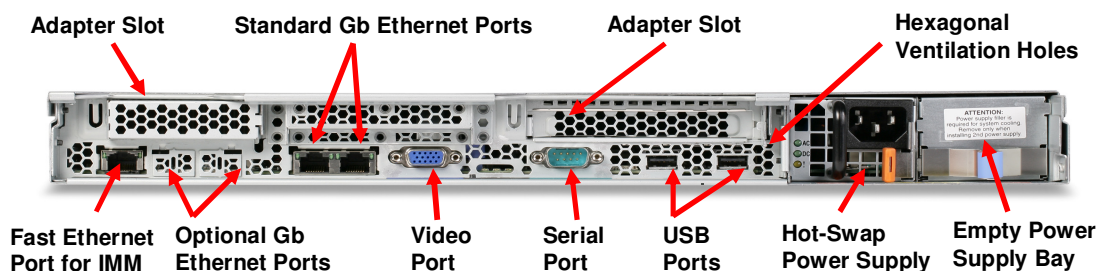

IBM System x3550 M3 Specifications		
Machine type	7944-12x, 22x, 32x, 52x/54x, 62x, 72x, 82x, D4x, H4x, J4x	
Form factor	1U	
Processor type	6-Core Xeon (E56xx/L56xx/X56xx) 2.26GHz L5640 (H4x), 2.4GHz E5645 (52x/54x), 2.53GHz E5649 (62x), 2.66GHz X5650 (J4x), 2.8GHz X5660 (via CTO), 3.06GHz X5675 (72x), 3.46GHz X5690 (82x)	4-Core Xeon (E56xx/L56xx/X56xx) 1.6GHz E5603 (12x), 1.86GHz L5609 (CTO), 2.13GHz E5606 (22x), 2.13GHz L5630 (CTO), 2.26GHz E5607 (32x), 2.4GHz E5620 (D4x), 2.93GHz X5647 (CTO), 3.2GHz X5672 (CTO), 3.6GHz X5687 (CTO),

Leadership enterprise server with significantly lower cost of ownership in a highly available and expandable, rack-dense, 1U dual-socket server

IBM System x3550 M3 Specifications					
Maximum processor power draw	130W—82x (X5647/X5687 via CTO)	95W—72x, J4x (X5660/X5672 via CTO)	80W—12x, 22x, 32x, 52x/54x, 62x, D4x	60W—H4x	40W—L5609/L5630 via CTO
QuickPath Interconnect (QPI) speed (gigatransfers per second)	6.4GTps 6.4GTps (72x, 82x, J4x, X5660/X5672/X5687 via CTO)		5.86GTps 5.86GTps (52x/54x, 62x, D4x, H4x, L5630 and X5647 via CTO)		4.8GTps 4.8GTps (12x, 22x, 32x, L5609 via CTO)
# of processors standard / maximum	2 / 2 (54x)			1 / 2 (all other models)	
Hyper Threading Technology supported	Yes (2 threads per core)—52x/54x, 62x, 72x, 82x, D4x, H4x, J4x, L5630, X5647/X5660/X5672/X5687 via CTO			No—12x, 22x, 32x, L5609 via CTO	
Turbo Boost Technology supported	Yes—52x/54x, 62x, 72x, 82x, D4x, H4x, J4x, L5630, X5647/X5660/X5672/ X5687 via CTO			No—12x, 22x, 32x, L5609 via CTO	
Internal L3 cache	12MB (1 shared 12MB cache)—(all other models)		8MB (1 shared 8MB cache)—(22x,32x)		4MB (1 shared 4MB cache)—(12x)
Chipset	Intel 5520				
Standard memory (192GB maximum)	8GB (2 x 4GB)—54x			4GB (1 x 4GB)—12x, 22x, 32x, 52x, 62x, 72x, 82x, D4x, H4x, J4x	
# of DIMM sockets total / available	18 / 16—54x			18 / 17—12x, 22x, 32x, 52x, 62x, 72x, 82x, D4x, H4x, J4x	
Standard memory voltage	1.35V				
Standard memory type	Registered PC3-10600 (DDR III ECC (Chipkill protection standard)—Single-rank x4				
Maximum memory access speed	1333MHz (52x/54x, 62x, 72x, 82x, H4x, J4x, X5660/X5672/X5687 via CTO)			1066MHz (12x, 22x, 32x, D4x, L5609/L5630, X5647 via CTO)	
Memory interleaving	Yes (two-way using pairs DIMMs)				
DIMM types / capacities supported	PC3-10600 1333MHz RDIMM 2GB 1R x8, 1.35V; 2GB 2R x8 1.35V; 4GB 1R x4 1.35V; 4GB 2R x4 1.35V; 4GB 2R x8 1.35V; 8GB 2R x4 1.35V		PC3-10600 1333MHz UDIMM 2GB 1R x8 1.35V; 4GB 2R x8 1.35V		PC3L-8500R 1066MHz RDIMM 8GB 2R x4 1.35V; 16GB 4R x4 1.35V
Supports 1333MHz with 2 DIMMs per channel	L5640 and 1333MHz E56xx and X56xx processors support 2DPC at 1333MHz				
Online hot-spare memory supported	Yes on 5600 series				
Memory mirroring supported / # of DIMM sockets reserved for mirroring	Yes / 1 channel (3 slots per processor) active, 1 spare, 1 unused				
# of HDD drive bays total / available	8 / 8 (2.5-inch)			4 / 4 (2.5-inch) with internal optical drive	
# of 5.25" bays total / available	1 / 1				
Maximum drive capacity	2.5-inch SAS/SATA 8TB ⁹ (8 x 1TB) hot-swap	2.5-inch SAS/SATA 4TB (4 x 1TB) hot-swap, with Optical drive	2.5-inch SSD 400GB (8 x 50GB) hot-swap	2.5-inch SSD 200GB (4 x 50GB) hot-swap or simple-swap, with Optical drive	

⁹ 1TB drives available in 2Q/2011.

Leadership enterprise server with significantly lower cost of ownership in a highly available and expandable, rack-dense, 1U dual-socket server

IBM System x3550 M3 Specifications				
Drive capacities supported	2.5-inch HS SAS 500GB, 1TB—7.2K; 146.8, 300, 600GB — 10K; 73.4, 146.8GB—15K		2.5-inch HS SATA 160, 250, 500GB, 1TB— 7.2K	2.5-inch HS or SS SSD 50GB
# of HDDs standard	None (all models open bay)			
# of optical drives standard	None (optional DVD-RW)			
# of diskette drives standard	None (optional)			
Storage technology	Hot-swap SAS/SATA; also hot-swap or simple-swap SSD			
Integrated disk controller	LSI 1068			
# of disk drives supported <i>per port</i>	1			
Integrated RAID controller standard	ServeRAID-M5015 (512MB cache, includes battery, except CTO servers)—RAID-0/1/10/5/50; optional RAID-6/60 with SED; 6Gbps; supports 8 drives (72x, 82x, J4x)	ServeRAID-M5014 (256MB cache, battery optional)—RAID-0/1/10/5/50; optional RAID-6/60 with SED, optional battery; 6Gbps; supports 8 drives (52x/54x, 62x)	ServeRAID-M1015 (no cache)—RAID-0/1/10; optional RAID-5/50 with SED, 6Gbps; supports 8 drives (22x, 32x, D4x)	ServeRAID-BR10iI v2 (no cache)—RAID-0/1/1E, 3Gbps; supports 4 drives (12x)
Optional internal RAID controllers supported	ServeRAID-M1015—12X	ServeRAID-M5014 (battery optional)—12x, 22x, 32x, D4x	ServeRAID-M5015 (includes battery)—12x, 22x, 32x, 52x/54x, 62x, D4x	
External disk drives supported	Yes, via the optional 6Gbps ServeRAID-M5025 controller (512MB cache, RAID-0/1/10/5/50, and battery backup standard—SAS/SATA; optional RAID-6/60 with SED)			
# of adapter slots total / available	2 / 2 (2 / 1 when using the CTO Emulex 10GbE Integrated Virtual Fabric Adapter)			
# of PCIe x16 Gen 2 slots (16GBps)	2 via 2 risers (1 full-height/half-length, 1 low-profile/full-length)			
# of PCIe x8 Gen 2 slots (8GBps)	None			
# of PCI-X/133 slots (1GBps)	None standard (1 or 2 via optional risers in place of the PCIe risers)			
# of 33MHz legacy PCI slots	None			
# of video ports	2 (one front, one rear)			
Video controller	Matrox G200eV (in IMM) standard (NVIDIA FX580 available for CTO and special-bid models)			
Video memory	16MB DDR2 SDRAM			
Maximum video resolutions	1280x1024 at 60Hz (32 bits)		1600x1200 at 85Hz (16 bits)	
Gigabit Ethernet controller	Broadcom BCM5709S			
TOE/iSCSI/RDMA acceleration	TOE only			
# of Gigabit Ethernet ports	2 standard plus 2 optional			
# of RS485 ports	None			
# of serial ports	1 (rear)			
# of parallel ports	None (USB-attached)			
# of mouse ports	None (USB-attached)			
# of keyboard ports	None (USB-attached)			
# of USB 2.0 ports	5 (2 front, 2 rear, 1 internal for a USB flash memory key containing an embedded			

Leadership enterprise server with significantly lower cost of ownership in a highly available and expandable, rack-dense, 1U dual-socket server

IBM System x3550 M3 Specifications			
	hypervisor)		
Integrated systems management controller	Yes (IMM)		
Optional systems management adapter	Virtual Media Key (optional)		
Light path diagnostics support	Yes, with external pop-out/drop-down panel		
Predictive Failure Analysis (PFA) support	Processors, memory, voltage regulator modules (VRMs), power supplies and fans		
Power supply type	AC or DC, universal, autoswitching, hot-swap		
Power supply standard	460W (12x, 22x, 32x, 52x, 62x, D4x, H4x)—80 Plus Gold; up to 92% efficient	675W (72x, J4x)	675W high-efficiency (54x, 82x)—Up to 95% efficient
Optional power supply (replaces standard)	Second PS of the same type	1 or 2 675W -48V DC power supplies as replacement(s)	
# of power supplies standard / maximum	2 / 2 (54x)	1 / 2 (all other models)	
Hot-swap/redundant power supported	Yes (with two power supplies installed)		
# of fans modules standard / maximum	6 / 6 (54x)	5 / 6 (all other models)	
Hot-swap/redundant fans supported	Yes (standard)		
NEBS 1/ETSI compliance	Equivalent compliance for both AC and DC power supply (model dependent)		
Energy-efficiency standards compliance	Compliant with 80 PLUS Gold and ENERGY STAR standards (model dependent)		
Rack mount method	Slides and Cable Management Arm (provided standard)		
Maximum altitude	7,000 ft; 2,133 m		
Operating temperature range	50 – 95° F; 10 – 35° C (up to 3,000 ft / 914.4 m)	50 – 90° F; 10 – 32° C (3,000 ft to 7,000 ft / 914.4m to 2,133m)	
Dimensions (HWD) / weight	1.69" (43mm) H 17.3" (440mm) W 28.0" (711.4mm) D	28 (minimum) – 35.1 lb (maximum) 12.7 – 15.9 kg	
Operating systems supported	Microsoft Windows Server 2008 / 2008 R2, 32/64-bit; Microsoft Windows Server 2003 / 2003 R2 (Standard/Enterprise/Web/Datacenter/Datacenter with UV), 32/64-bit; RHEL 5 32/64-bit, with and without Xen; RHEL 6 32/64-bit; SLES 10/11 32/64-bit with and without Xen; VMware vSphere Hypervisor 4.1; Sun Solaris 10 (model dependent)		
Length of limited warranty	3 years (parts and labor) ¹⁰		

The Bottom Line

The IBM System x3550 M3 is an extremely energy efficient, powerful system, incorporating significantly redesigned management tools and abundant IBM-unique innovations:

Price/Performance

- **High-throughput processors** — Up to two **2.40 to 3.46GHz 6-core**, **1.6GHz to 3.6GHz 4-core**; **2.26GHz low-voltage 6-core** or **1.86GHz to 2.13GHz low-voltage 4-core** Xeon 5600 series processors
- **Energy-efficient low-voltage processors** — **40W 4-core** and **60W 6-core** Xeon 5600 series processors

¹⁰ For terms and conditions or copies of the IBM Statement of Limited Warranty, call 800-772-2227 in the U.S. In Canada call 800-426-2255. IBM makes no representation or warranty regarding third-party products or services including those designated as ServerProven or ClusterProven. Telephone support may be subject to additional charges. For warranties including onsite labor, a technician is sent after IBM attempts to resolve the problem remotely. International warranty service is available in any country in which this product is sold.

- **Hyper Threading Technology** for up to **12** processor cores and **24** threads total (processor-specific)
- **Turbo Boost Technology** for a performance boost when not all cores are in use (processor-specific)
- **Large cache** — **4MB-12MB** of L3 processor cache (processor-specific)
- **Fast memory** — Registered **PC3-10600 DDR III ECC** DIMMs standard, operating at **1333MHz** or **1066MHz** (depending on processor model and memory configuration); supports 2 DIMMs per channel at 1333MHz (processor-specific)
- **Fast disk technology** — Supports high-performance SAS drives that provide high density/high reliability and allow you to scale up as your business grows.
- **High IOPS SSDs** — Solid-state drives offer significantly higher I/O operations per second than HDDs
- **Fast communications** — Integrated **dual Gigabit Ethernet** controllers standard supporting **load-balancing** and **failover**; **two additional NICs optional**
- **Fast I/O** — Two **PCIe x16** adapter slots (replaceable with two PCI-X/133 slots)

Flexibility

- **Large memory capacity** — Up to **192GB** of registered DDR3 DIMMs, in **18** DIMM slots
- Up to **8 2.5-inch hot-swap** SAS/SATA HDDs or SSDs or **simple-swap** SSDs
- **Choice of disk storage** — Up to **8TB** of internal SAS/SATA storage, **400GB** of internal solid-state storage
- **High-performance external expansion** — **Five** 480Mbps **USB 2.0** ports (two front, two rear, one internal for an optional USB key with hypervisor)
- Slotless hardware-based **3Gbps RAID-0/1/1E**, or **6Gbps RAID-0/1/10** or **RAID-0/1/10/5/50** standard
- **Two available** adapter slots —
 - ❑ **Two x16¹¹ PCIe** slots (Gen2)
 - ❑ An optional riser card containing **one 133MHz PCI-X** slot can replace the riser card containing each of the PCIe slots
- Optional **DVD-RW** drive
- Choice of **3** power supplies standard (**460W**, **675W**, **675W high-efficiency**, plus an **optional 675W DC** (replaces standard AC power supplies)
- **Two video ports** (one on the front and one on the back)

Manageability, Serviceability and Availability

- **IBM Systems Director** systems management software, including (among others):
 - ❑ IBM Systems Director Active Energy Manager
 - ❑ IBM Service and Support Manager
- **Integrated Management Module (IMM)**:
 - ❑ **IPMI 2.0** compliance, including highly secure remote power control
 - ❑ **Text console redirection** systems management standard
- **Active Memory protection**:
 - ❑ Advanced **Chipkill** ECC memory protection support
 - ❑ **Memory mirroring**
- Integrated slotless **ServeRAID** controller — enhances system availability and serviceability without using a PCIe slot
- A combination of **hot-swap SAS/SATA** HDDs or **SSDs**, or **simple-swap SSDs**—for quicker servicing than with fixed drives
- **Solid-state drives** as a high-reliability alternative to internal storage (with up to three times the MTBF of spinning disk drives)
- **Ultra-efficient cooling** incorporating **Calibrated Vectored Cooling** features and **hot-swap/redundant fan modules**
- Standard or optional **hot-swap/redundant power supplies** (model-specific)
- **Light path diagnostics** (front LED panel, pop-out/drop-down light path panel)
- Optional Virtual Media Key daughter card (no slot required)

¹¹ The x8 slots can accept x1, x4, or x8 adapters running at x1, x4, or x8 throughput, respectively.

Leadership enterprise server with significantly lower cost of ownership in a highly available and expandable, rack-dense, 1U dual-socket server

❑ Supports **LDAP** and **SSL** industry standards

• **Toolless chassis** and **toolless slide** design; integrated **Cable Management Arm**

Server Comparison Chart

The following table shows the suggested uses for the respective IBM System x rack-optimized servers, including comparisons of the uses for which each server is best suited:

		Requirements									Rack-Optimized Servers									
Theme	Key Workloads	Scalability	Performance	Memory Throughput	Integer Performance	I/O and Storage	Density	High Availability	Systems Management	Security	Distributed Deployment	x3250 M3	x3550 M3	x3620 M3	x3630 M3	x3650 M3	x3690 X5	x3755 M3	x3850 X5	x3950 X5
HPC	Cluster / HPC																			
	Modeling & Simulation																			
	High Performance DB																			
	Business Intelligence																			
Web 2.0 / Web 3D	Search																			
	Content																			
	Communities																			
	Commerce																			
Business Applications	Collaboration																			
	ERP/SCM																			
	CRM																			
	Hosted Client																			
Infrastructure Applications	Point of Sale																			
	Branch Office																			
	Virtualization																			
	Business Continuity																			
	Database																			
	Email/Collaboration																			
	Security																			
	Web Serving																			
	File & Print																			

Important

Nice to Have

Can do without

Best

Better

Good

For More Information

IBM System x Servers
IBM Systems Director Service and Support Manager
IBM System x and BladeCenter Power Configurator
IBM Standalone Solutions Configuration Tool
IBM Configuration and Options Guide
IBM ServerProven Program
Technical Support
Other Technical Support Resources

<http://ibm.com/systems/x>
<http://ibm.com/support/electronic>
<http://ibm.com/systems/bladecenter/resources/powerconfig.html>
<http://ibm.com/systems/x/hardware/configtools.html>
<http://ibm.com/systems/x/hardware/configtools.html>
<http://ibm.com/systems/info/x86servers/serverproven/compat/us>
<http://ibm.com/server/support>
<http://ibm.com/systems/support>

Legal Information

© IBM Corporation 2011
IBM Systems and Technology Group
Dept. U2SA
3039 Cornwallis Road
Research Triangle Park, NC 27709

Produced in the USA
February 2011
All rights reserved

For a copy of applicable product warranties, write to: Warranty Information, P.O. Box 12195, RTP, NC 27709, Attn: Dept. JDJA/B203. IBM makes no representation or warranty regarding third-party products or services including those designated as ServerProven or ClusterProven. Telephone support may be subject to additional charges. For onsite labor, IBM will attempt to diagnose and resolve the problem remotely before sending a technician.

IBM, the IBM logo, ibm.com, Active Memory Manager, Active Memory, Calibrated Vectored Cooling, OnForever, ServeRAID, System Storage, System x, Wake on LAN, and X-Architecture are trademarks of IBM Corporation in the United States and/or other countries, or both. If these and other IBM trademarked terms are marked on their first occurrence in this information with a trademark symbol (® or ™), these symbols indicate U.S. registered or common law trademarks owned by IBM at the time this information was published. Such trademarks may also be registered or common law trademarks in other countries. A current list of IBM trademarks is available at <http://ibm.com/legal/copytrade.shtml>.

80 PLUS and the 80 PLUS logo are registered trademarks of Eco-Consulting.

ENERGY STAR and the ENERGY STAR logo are registered trademarks of the U.S. Environmental Protection Agency.

Intel and Xeon are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Linux is a registered trademark of Linus Torvalds.

Microsoft, Windows, Windows Server, and the Windows logo are trademarks or registered trademarks of Microsoft Corporation.

Other company, product and service names may be trademarks or service marks of others.

IBM reserves the right to change specifications or other

product information without notice. References in this publication to IBM products or services do not imply that IBM intends to make them available in all countries in which IBM operates. IBM PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions; therefore, this statement may not apply to you.

This publication may contain links to third party sites that are not under the control of or maintained by IBM. Access to any such third party site is at the user's own risk and IBM is not responsible for the accuracy or reliability of any information, data, opinions, advice or statements made on these sites. IBM provides these links merely as a convenience and the inclusion of such links does not imply an endorsement.

Information in this presentation concerning non-IBM products was obtained from the suppliers of these products, published announcement material or other publicly available sources. IBM has not tested these products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

MB, GB and TB = 1,000,000, 1,000,000,000 and 1,000,000,000,000 bytes, respectively, when referring to storage capacity. Accessible capacity is less; up to 3GB is used in service partition. Actual storage capacity will vary based upon many factors and may be less than stated.

Performance is in Internal Throughput Rate (ITR) ratio based on measurements and projections using standard IBM benchmarks in a controlled environment. The actual throughput that any user will experience will depend on considerations such as the amount of multiprogramming in the user's job stream, the I/O configuration, the storage configuration and the workload processed. Therefore, no assurance can be given that an individual user will achieve throughput improvements equivalent to the performance ratios stated here.

Maximum internal hard disk and memory capacities may require the replacement of any standard hard drives and/or memory and the population of all hard disk bays and memory slots with the largest currently supported drives available. When referring to variable speed CD-ROMs, CD-Rs, CD-RWs and DVDs, actual playback speed will vary and is often less than the maximum possible.

XSO03094-USEN-03



Dell PowerEdge R610

The Dell™ PowerEdge™ R610 offers simplified management, purposeful design, and energy efficiency combined in a rack server that can help you better manage your enterprise.

Strong IT Foundation

The Dell PowerEdge R610 is a key building block for today's data center. Designed for versatility and high performance, it provides many of the virtualization, system management, and energy-efficiency features you need now and the scalability necessary to change as your business grows. This general purpose Intel® processor-based 2-socket 1U server is ideal for corporate data centers and remote sites that require a dense, highly available single- or dual-processor server at an excellent value.

Purposeful Design

The PowerEdge R610 follows the 11th generation PowerEdge portfolio specifications and features the same system design commonality and reliability true to the entire portfolio. All 11th generation servers are designed to make the experience easier. We put all external ports, power supplies, LCD screens, and LED lights in the same location for familiar experience as well as easy installation and deployment.

Robust, metal hard drive carriers and organized cabling are designed to help improve component access and airflow across the server. The PowerEdge R610 provides an interactive LCD screen or LED display positioned on the front of the server for ease of monitoring and troubleshooting condition of the server.

Enhanced Virtualization

Featuring Intel® Xeon® processor-based architecture, embedded hypervisors, and expanded memory footprint and I/O, the Dell PowerEdge R610 delivers exceptional overall system performance and significant virtual machine-per-server capacity versus the previous generation. With optional factory-integrated virtualization capabilities, you get tailored solutions—built with the latest technologies from Dell and our trusted partners—which allow you to streamline deployment and simplify virtual infrastructures. Choose your hypervisor from market leaders such as VMware®, Citrix®, and Microsoft®, and enable virtualization with a few mouse clicks.

Energy-Optimized Technologies

Dell's advanced thermal control helps optimize performance while minimizing system power consumption, ultimately driving energy efficiency across our latest core data center servers. These enhancements, over previous generations, include efficient power supply units right-sized for system requirements, improved system-level design efficiency, policy-driven power and thermal management, and highly efficient standards-based Energy Smart components. Dell's advanced thermal control is designed to deliver optimal performance at minimum system and fan power consumption resulting in our quietest mainstream 1U servers to date.

Simplified Systems Management

With the optional advanced embedded systems management capabilities of Lifecycle Controller, Dell provides comprehensive enterprise class manageability already on the motherboard. Lifecycle Controller is delivered as part of the optional iDRAC Express or iDRAC Enterprise in the PowerEdge R610. The Lifecycle Controller helps to simplify administrator tasks by performing a comprehensive set of provisioning functions such as system deployment, system updates, hardware configuration and diagnostics from a single intuitive interface called Unified Server Configurator (USC) in a pre-OS environment. This helps eliminate the need to use and maintain multiple pieces of disparate CD/DVD media.

Also part of the Dell OpenManage™ portfolio is the Dell Management Console which is included with every Dell server and provides IT administrators with a consolidated console view of their IT infrastructure.

Dell Services

Dell Services can help reduce IT complexity, lower costs, and eliminate inefficiencies by making IT and business solutions work harder for you. The Dell Services team takes a holistic view of your needs and designs solutions for your environment and business objectives while leveraging proven delivery methods, local talent, and in-depth domain knowledge for the lowest TCO.

Inspired by customer feedback, the Dell PowerEdge R610 server is engineered to simplify data center operations, improve energy efficiency, and lower total cost of ownership.

Feature	Technical Specification
Form Factor	1U rack
Processors	Quad-core or six-core Intel® Xeon® processors 5500 and 5600 series
Processor Sockets	2
Front Side Bus or HyperTransport	Intel® QuickPath Interconnect (QPI)
Cache	4MB and 8MB
Chipset	Intel® 5520
Memory ¹	Up to 192GB (12 DIMM slots): 1GB/2GB/4GB/8GB/16GB DDR3 up to 1333MHz
I/O Slots	2 PCIe G2 slots + 1 storage slot: Two x8 slots One storage x4 slot
RAID Controller	Internal: PERC H200 (6Gb/s) PERC H700 (6Gb/s) with 512MB battery-backed cache; 512MB, 1GB Non-Volatile battery-backed cache SAS 6/iR PERC 6/i with 256MB battery-backed cache External: PERC H800 (6Gb/s) with 512MB of battery-backed cache; 512MB, 1GB Non-Volatile battery-backed cache PERC 6/E with 256MB or 512MB of battery-backed cache External HBAs (non-RAID): 6Gbps SAS HBA SAS 5/E HBA LSI2032 PCIe SCSI HBA
Drive Bays	Internal hard drive bay and hot-plug backplane. Up to six 2.5" SAS, or SSD Drives
Maximum Internal Storage	Up to 12TB
Hard Drives ¹	Hot-plug Hard Drive Options: 2.5" SAS SSD, SATA SSD, SAS (10K, 15K), nearline SAS (7.2K), SATA (7.2K)
Communications	Two dual port embedded Broadcom® NetXtreme® II 5709c Gigabit Ethernet NIC with failover and load balancing. Optional 1GBe and 10GBe add-in NICs Broadcom® NetXtreme® II 57711 Dual Port Direct Attach 10Gb Ethernet PCI-Express Network Interface Card with TOE and iSCSI Offload Intel® Gigabit ET Dual Port Server Adapter and Intel® Gigabit ET Quad Port Server Adapter Dual Port 10GB Enhanced Intel Ethernet Server Adapter X520-DA2 (FCoE Ready for Future Enablement) Brocade® CNA Dual-port adapter Emulex® CNA iSCSI HBA stand up adapter OCE10102-IX-D Emulex® OCE10102-IX-DCNA iSCSI HBA stand-up adapter Optional Add-In HBA's: Brocade® 8 GB HBAs
Power Supply	Two hot-plug high-efficient 502W Energy Smart PSU or two hot-plug 717W High Output PSUs Uninterruptible Power Supplies: 1000W-5600W 2700W-5600W High Efficiency Online Extended Battery Module (EBM) Network Management Card
Availability	DDR3 memory; ECC; hot-plug hard drives; optional hot-plug redundant power supplies; dual embedded NICs with failover and load balancing support; optional PERC6/i integrated daughtercard controller with battery-backed cache; hot-plug redundant cooling; tool-less chassis; fibre and SAS cluster support; validated for Dell/EMC SAN
Video	Integrated Matrox® G200, 8MB shared video memory
Remote Management	iDRAC6 Enterprise (optional)
Systems Management	Dell™ OpenManage™
Embedded Hypervisor	Optional Embedded SD Media
Rack Support	ReadyRails™ sliding rails with optional cable management arm for 4-post racks (optional adapter brackets required for threaded hole racks); ReadyRails™ static rails for 2-post and 4-post racks
Operating Systems	Microsoft® Windows® Small Business Server 2011 Microsoft® Windows® Small Business Server 2008 Microsoft® Windows Server® 2008 SP2, x86/x64 (x64 includes Hyper-V™) Microsoft® Windows Server® 2008 R2, x64 (includes Hyper-V™ v2) Microsoft® Windows® HPC Server 2008 R2 Novell® SUSE® Linux® Enterprise Server Red Hat® Enterprise Linux® Oracle® Solaris™ Virtualization Options: Citrix® XenServer™ VMware® vSphere™ 4.1 (including VMware ESX® 4.1 or VMware ESXi™ 4.1)
Featured Database Applications	For more information on the specific versions and additions, visit www.dell.com/OSsupport . Microsoft® SQL Server® solutions (see Dell.com/SQL) Oracle® database solutions (see Dell.com/Oracle)

¹ GB means 1 billion bytes and TB equals 1 trillion bytes; actual capacity varies with preloaded material and operating environment and will be less.

OEM Ready Models Available

OEM Ready platforms are grab-and-go products for OEM customers delivering a fast and simple path to a custom-branded solution. For more information, please visit dell.com/OEM.

Learn more at Dell.com/PowerEdge

© 2011 Dell Inc. All rights reserved. Dell, the DELL logo, the DELL badge, PowerEdge, and OpenManage are trademarks of Dell Inc. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell disclaims proprietary interest in the marks and names of others. This document is for informational purposes only. Dell reserves the right to make changes without further notice to any products herein. The content provided is as is and without express or implied warranties of any kind.





Para a outra solicitação referente à certificação do Inmetro (Portaria n.º 170, de 10 de abril de 2012) para fontes de computadores solicitados nos itens da referida licitação (“Fonte de Alimentação HP 750W Part Number – AC 750W PSU OPTION kit 512327-B21 para Servidor HP Proliant DL160 G6”, “Fonte de Alimentação IBM Hot-Swap 675W High-Efficiency AC P/N 39Y7235 para Servidores IBM X3550”, “Fonte de Alimentação hot-plug High-Output 717W Redundant P/N FJVYV para Servidor Dell PowerEdge R610” e “Fonte de Alimentação HP 400W P/N 536403-001 para Servidores DL120 G6”), em pesquisa no mercado não foi possível verificar que os mesmos passaram por uma certificação do INMETRO.

Os possíveis motivos podem ser:

- Os equipamentos solicitados foram fabricados anterior à publicação da referida portaria;
- O objetivo da portaria é a certificação voluntária;

Por isso não se justifica exigir nas especificações a certificação do INMETRO

Atenciosamente,

Leandro Carvalho Leal
Analista Tecnologia da Informação
DTI/ UFVJM

Elton Pereira Rosa
Diretor de Tecnologia da Informação
DTI/ UFVJM